

Date: _____
 In hands date of project: _____
 Project name/Number: _____
 Name of distributor: _____
 Client #: _____
 Name of end user: _____



ORDERING INFORMATION


Order code: 64203
 Description: LPHBB/ACR70/STD
 UPC: 69549642034
 Case quantity: 1

FEATURES AND SPECIFICATIONS


Accessory for: LPHBB Series
 Material: Acrylic
 Beam Angle: 70°

WITH 64850

PHOTOMETRICS - BEAM SPREAD

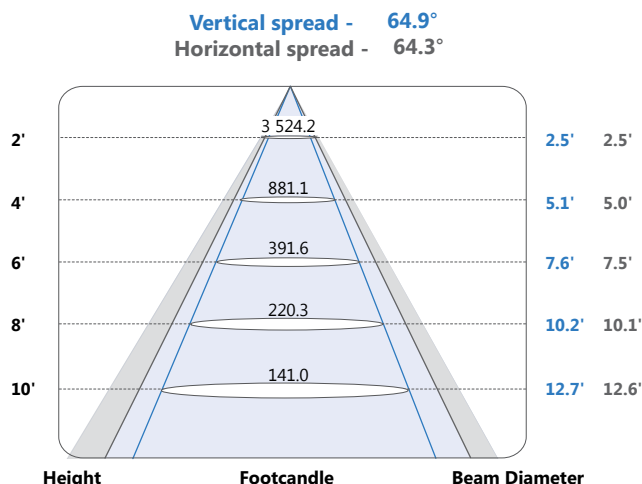

PHOTOMETRICS - CANDELA DISTRIBUTION

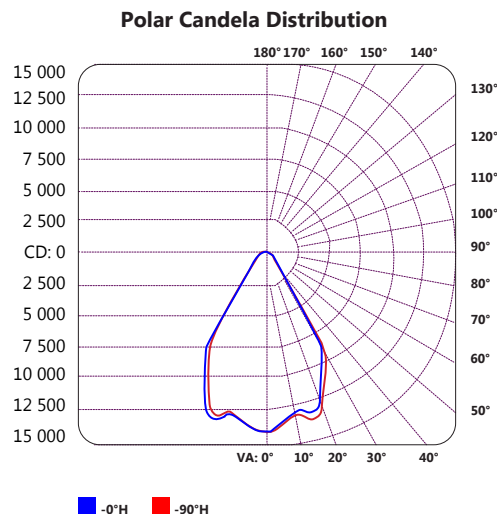

PHOTOMETRICS - COEFFICIENTS OF UTILIZATION (ZONAL CAVITY METHOD)

RCC %:	80				70				50				30				10				0
RW %:	70	50	30	0	70	50	30	0	50	30	20	10	50	30	20	10	50	30	20	10	0
RCR: 0	1.18	1.18	1.18	1.18	1.15	1.15	1.15	.96	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.99	.96		
1	1.11	1.07	1.04	1.01	1.08	1.04	1.01	.87	1.00	.97	.95	.95	.93	.92	.91	.90	.88	.88	.86		
2	1.04	.98	.92	.88	1.01	.95	.91	.79	.92	.88	.84	.88	.85	.82	.85	.82	.80	.78	.78		
3	.97	.89	.83	.78	.95	.88	.82	.72	.84	.80	.76	.81	.77	.74	.79	.75	.73	.71	.71		
4	.91	.82	.76	.71	.89	.81	.75	.66	.78	.73	.69	.76	.71	.68	.73	.70	.66	.65	.65		
5	.86	.76	.69	.64	.84	.75	.69	.61	.73	.67	.63	.71	.66	.62	.69	.64	.61	.59	.59		
6	.81	.71	.64	.59	.79	.70	.63	.56	.68	.62	.58	.66	.61	.57	.64	.60	.56	.55	.55		
7	.77	.66	.59	.54	.75	.65	.59	.52	.63	.58	.53	.62	.57	.53	.60	.56	.52	.51	.51		
8	.72	.62	.55	.50	.71	.61	.54	.48	.59	.54	.50	.58	.53	.49	.57	.52	.49	.47	.47		
9	.69	.58	.51	.47	.67	.57	.51	.45	.56	.50	.46	.55	.49	.46	.54	.49	.45	.44	.44		
10	.65	.54	.48	.44	.64	.54	.48	.42	.53	.47	.43	.52	.46	.43	.51	.46	.43	.41	.41		


Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

February 2, 2016


STANDARD®

WITH 64852

PHOTOMETRICS - BEAM SPREAD

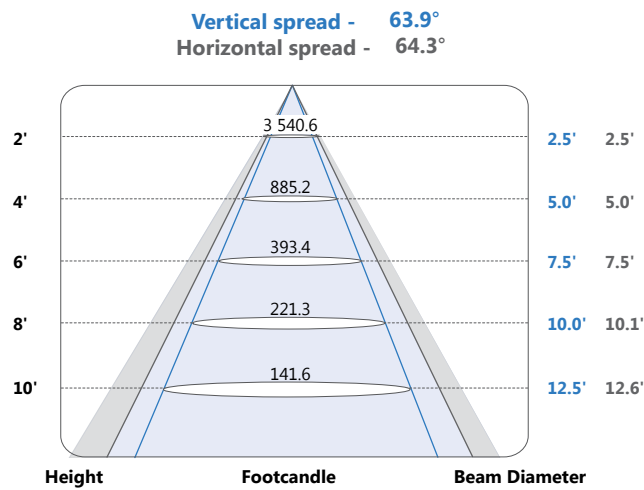


PHOTOMETRICS - CANDELA DISTRIBUTION

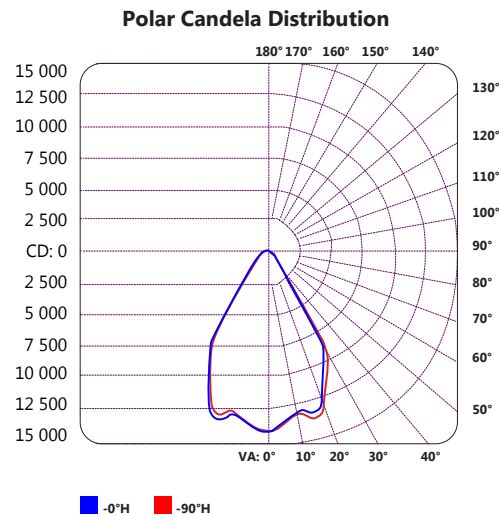

PHOTOMETRICS - COEFFICIENTS OF UTILIZATION (ZONAL CAVITY METHOD)

RCC %:	80				70				50				30				10				0
RW %:	70	50	30	0	70	50	30	0	50	30	20	10	50	30	20	10	50	30	20	10	0
RCR: 0	1.18	1.18	1.18	1.18	1.15	1.15	1.15	.96	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.99	.99	.99	.96
1	1.11	1.07	1.04	1.01	1.08	1.04	1.01	.87	1.00	.97	.95	.95	.93	.92	.91	.90	.88	.86	.86	.86	.86
2	1.04	.98	.92	.88	1.01	.95	.91	.79	.91	.88	.84	.88	.85	.82	.84	.82	.80	.78	.78	.78	.78
3	.97	.89	.83	.78	.95	.88	.82	.72	.84	.80	.76	.81	.77	.74	.79	.75	.73	.71	.71	.71	.71
4	.91	.82	.76	.71	.89	.81	.75	.66	.78	.73	.69	.76	.71	.68	.73	.69	.66	.64	.64	.64	.64
5	.86	.76	.69	.64	.84	.75	.69	.61	.73	.67	.63	.70	.66	.62	.68	.64	.61	.59	.59	.59	.59
6	.81	.71	.64	.59	.79	.70	.63	.56	.68	.62	.58	.66	.61	.57	.64	.60	.56	.55	.55	.55	.55
7	.77	.66	.59	.54	.75	.65	.59	.52	.63	.58	.53	.62	.57	.53	.60	.56	.52	.51	.51	.51	.51
8	.72	.62	.55	.50	.71	.61	.54	.48	.59	.54	.50	.58	.53	.49	.57	.52	.49	.47	.47	.47	.47
9	.69	.58	.51	.47	.67	.57	.51	.45	.56	.50	.46	.55	.49	.46	.53	.49	.45	.44	.44	.44	.44
10	.65	.54	.48	.44	.64	.54	.48	.42	.53	.47	.43	.52	.46	.43	.51	.46	.43	.41	.41	.41	.41

TECHNICAL DRAWING

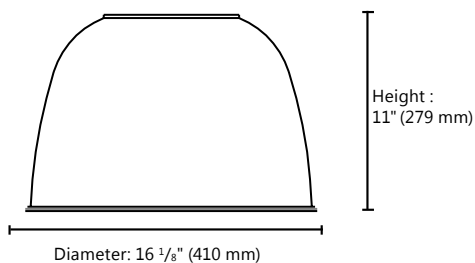

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

February 2, 2016

STANDARD