



LPDL LED Downlight



Order code	Description	Watts (W)	Colour	Volts (VAC)	Colour temp. (K)	CRI	Average life ¹ (hrs)	Initial lumens ² (lm)	Traditional equivalent (W)	Beam angle (°)	Dimmable ³ (Yes/No)	Case qty
4" Round Downlight												
MOL : 3/16 in. (21 mm) DIA: 4 23/32 in. (120.5 mm)												
63879	LPDL4/RND/9W/27K/WH/STD	9	White	120	2 700	80	40 000	510	50	120	Y	1/24
63882	LPDL4/RND/9W/30K/WH/STD	9	White	120	3 000	80	40 000	530	50	120	Y	1/24
63884	LPDL4/RND/9W/30K/SLV/STD	9	Brushed Nickel	120	3 000	80	40 000	530	50	120	Y	1/24
63883	LPDL4/RND/9W/30K/BLK/STD	9	Black	120	3 000	80	40 000	530	50	120	Y	1/24
63885	LPDL4/RND/9W/40K/WH/STD	9	White	120	4 000	80	40 000	550	50	120	Y	1/24
63887	LPDL4/RND/9W/40K/SLV/STD	9	Brushed Nickel	120	4 000	80	40 000	550	50	120	Y	1/24
63886	LPDL4/RND/9W/40K/BLK/STD	9	Black	120	4 000	80	40 000	550	50	120	Y	1/24
65364*	LPDL4/RND/9W/30-22K/WH/W-DIM/STD	9	White	120	3 000 - 2 200	80	40 000	500	50	110	Y	1/24
65365*	LPDL4/RND/9W/30-22K/SLV/W-DIM/STD	9	Brushed Nickel	120	3 000 - 2 200	80	40 000	500	50	110	Y	1/24

6" Round Downlight												
MOL : 3/16 in. (21 mm) DIA: 6 3/8 in. (174.5 mm)												
63864	LPDL6/RND/12W/30K/WH/STD	12	White	120	3 000	80	40 000	780	60	120	Y	1/24
63866	LPDL6/RND/12W/30K/SLV/STD	12	Brushed Nickel	120	3 000	80	40 000	780	60	120	Y	1/24
63867	LPDL6/RND/12W/40K/WH/STD	12	White	120	4 000	80	40 000	820	60	120	Y	1/24
63869	LPDL6/RND/12W/40K/SLV/STD	12	Brushed Nickel	120	4 000	80	40 000	820	60	120	Y	1/24

4" Square Downlight												
MOL : 3/16 in. (21 mm) DIA: 4 23/32 in. (120.5 mm)												
63891	LPDL4/SQR/9W/30K/WH/STD	9	White	120	3 000	80	40 000	530	50	120	Y	1/24
63893	LPDL4/SQR/9W/30K/SLV/STD	9	Brushed Nickel	120	3 000	80	40 000	530	50	120	Y	1/24






Quality and sophistication in one slim design!

Thanks to a sleek design, the **LPDL (Low Profile Downlight)** gives you all the flexibility you need during installation, especially in confined areas or when facing constraints such as wood beams, ceiling joist or air ducts. The driver is mounted separately from the light source and linked by a fire rated wire with a twist lock connection. This allows the luminaire profile to be less than 1" thick! They are perfect for almost any residential and commercial indoor lighting applications.

The warm dim Low Profile Downlight allows you change colour temperature by simply dimming the lights. Dim from a white (3 000 K) to warm white (2 200 K), with the same luminaire! Transition from task lighting to ambiance lighting seamlessly.

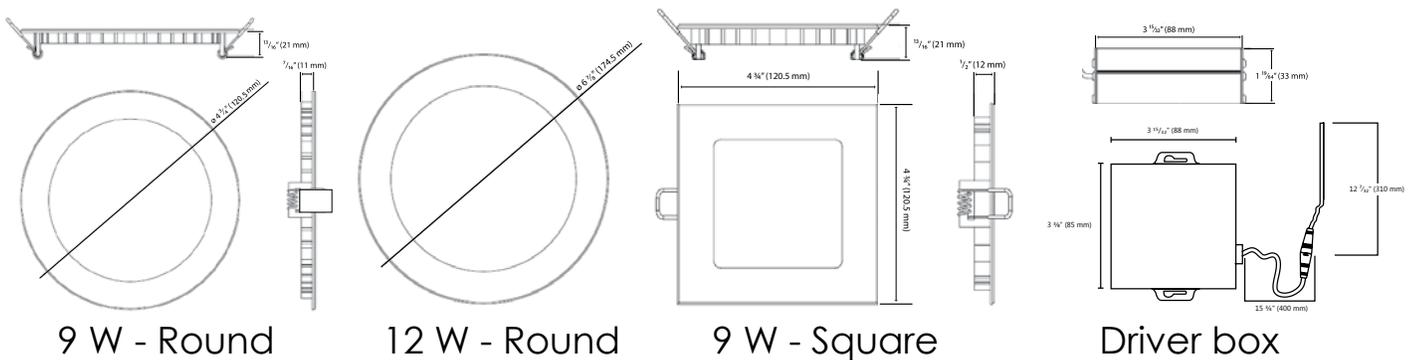

Accessories

Order Code	Description	Type
62676	RF/ACC/4/MOUNT. PLATE/SQR/STD	4" square mounting plate
64263	RF/ACC/6/MOUNT. PLATE/SQR/STD	6" square mounting plate
62677	RF/ACC/4/MOUNT. PLATE/ADJ/STD	4" adjustable mounting plate
64921	RF/ACC/6/MOUNT. PLATE/ADJ/STD	6" adjustable mounting plate
62678	RF/ACC/4/MOUNT. PLATE/HANG.BARS/STD	4" mounting plate with hanger bars
64264	LPDL/ACC/6FT/EXTCABLE/STD	6' extension cord



¹ Life rating based on L70 lumen depreciation design criteria. Average life of downlight that have been approved for ENERGY STAR early submission or complete submission can vary. ENERGY STAR early submission dictates that manufacturers can only claim 40 000 hour life with 3 000 hour actual life test data, 6 000 hour LM-80 data and in-situ temperature measurements. Once a product has been fully qualified, manufacturers may increase the lifetime of a product by demonstrating full compliance with the ENERGY STAR criteria at the new lifetime with lumen maintenance at the minimum required test period.

² Typical lumens +/- 10 %

³ For a complete list of compatible dimmers, housings and ENERGY STAR qualified products, please visit www.standardpro.com