


## RP418A-C & RP818A, B Electric/Pneumatic Relays

### SPECIFICATION DATA

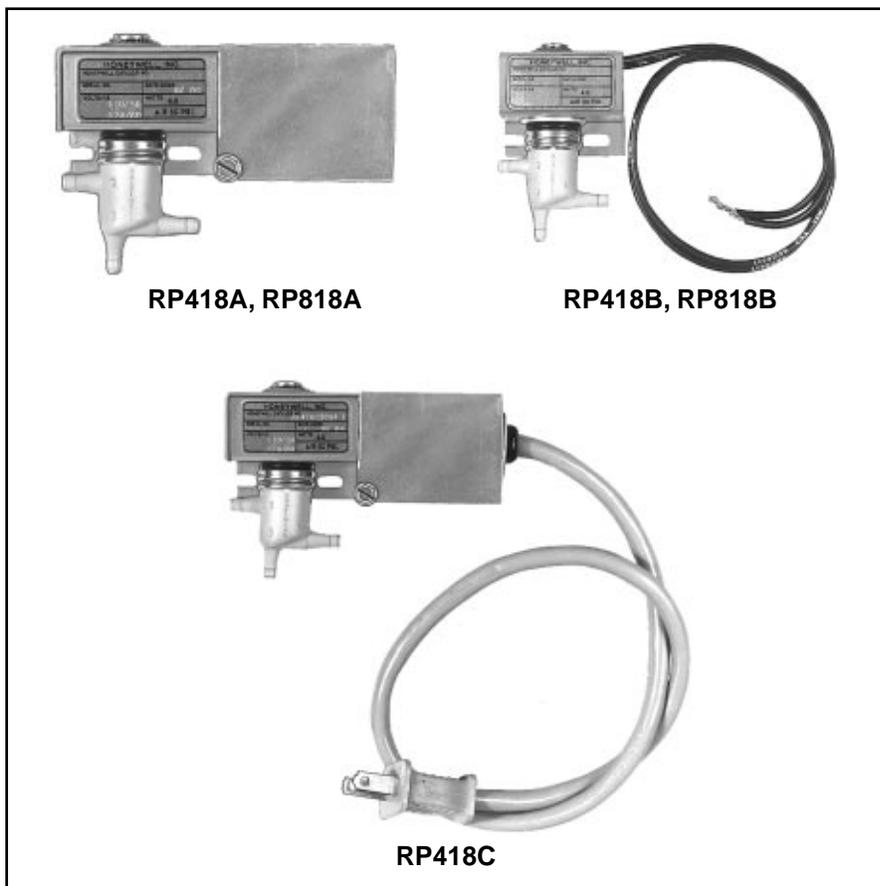

### FEATURES

- Usable as a diverting relay, a selector relay, or a stop and bleed relay
- Mount and operate in any position
- Directly mounts to MP516A Actuators, VP516C Valves, or PP901B and PP902D Pressure Regulators
- Available with lead wires, junction box, or plug-in electric connections

### GENERAL

The RP418 and RP818 Electric/Pneumatic Relays are solenoid valves which open and close the air supply to pneumatic controls. The control input is an on/off line voltage signal to the RP418A-C and 24V ac signal to the RP818A and B.



## SPECIFICATIONS

**Models:**

√	Model	Line Voltage	Low Voltage	Wall Mount	Panel Mount	Device Mount	Splice Box	Open Coil	Cord & Plug
	RP418A	X		X		X	X		
	RP418B	X			X			X	
	RP418C	X		X		X	X		X
	RP818A		X	X		X	X		
	RP818B		X		X			X	

**Air Capacity:**

0.42 scfm (200 ml/s) at 20 psi (138 kPa) supply with 1 psi (7 kPa) pressure drop

**Capacity Index (Cv):**

0.075

**Pressure Rating:**

50 psi (340 kPa) maximum air

**Air Connections:**

1/4-in. (6-mm) O.D. plastic tubing

**Electrical Connections:**

RP418/818A: Junction Box and 15 in. (380 mm) leads

RP418/818B: 15 in. (leads

RP418C: Cord and plug

**Power Consumption:**

12.5 VA Inrush

7.1 VA Holding

**Ambient Temperature Rating:**

0 to 100F (-18 to 38C). (For ambient temperature rating to 120F [49 C], refer to RP418 Installation Instructions 95-6046.)

**Construction Materials:**

Valox 420 plastic and corrosion-resistant metal

**Approvals:**

RP418A, RP818A: UL Listed, Guide Y10Z

RP418B, RP818B, RP418C: UL-recognized component, File MP1502, Vol. 11, Sec. 1

CSA recognized—File No. LR50900

**Accessories:**

Mounting Kit 14003638-001 for direct mounting to MP516A, VP519C, PP901, and PP902

**Voltage Frequency:**

RP418A:

100, 110, 120, 200, 208, 220, 240, 277, 440, 480/50.

120, 208, 240, 277, 480, 575/60

RP418B:

110, 120, 208, 220, 240, 440,

480/50

120, 208, 240, 480, 575/60

RP818A,B:


24/50, 24/60

**Switching:**

Deenergized: Ports 2 and 3 connected, Port 1 blocked

Energized: Ports 1 and 3 connected, Port 2 blocked

Dimensions in inches (millimeters):

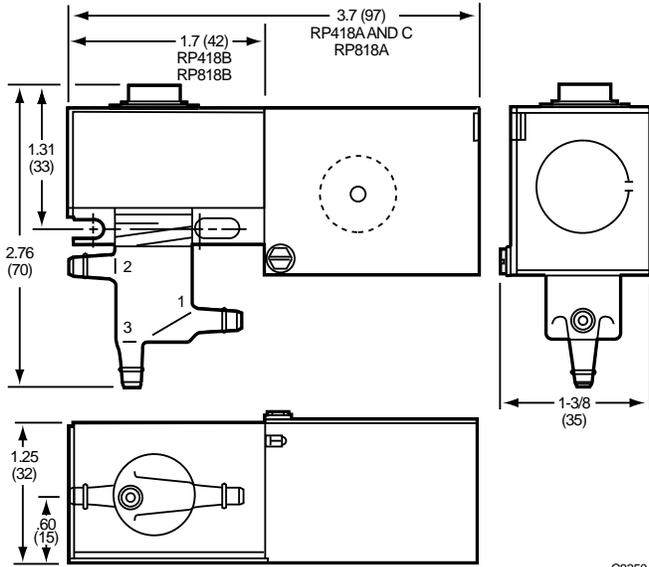

C8350

By using this Honeywell literature, you agree that Honeywell will have no liability for any damages arising out of your use or modification to, the literature. You will defend and indemnify Honeywell, its affiliates and subsidiaries, from and against any liability, cost, or damages, including attorneys' fees, arising out of, or resulting from, any modification to the literature by you.

**Home and Building Control**

Honeywell Inc.  
Honeywell Plaza  
P.O. Box 524  
Minneapolis MN 55408-0524

**Home and Building Control**

Honeywell Limited-Honeywell Limitée  
155 Gordon Baker Road  
North York, Ontario  
M2H 2C9

**Honeywell Asia Pacific Inc.**

Room 3213-3225  
Sun Hung Kai Centre  
No. 30 Harbour Road  
Wanchai  
Hong Kong

**Honeywell Latin American Division**

Miami Lakes Headquarters  
14505 Commerce Way Suite 500  
Miami Lakes FL 33016

**Honeywell Europe S.A.**

3 Avenue du Bourget  
B-1140 Brussels Belgium

---

**Honeywell**

*Helping You Control Your World*