

# INSTRUCTION SHEET

## for Water Inlet Valve



### ⚠ WARNING

#### Electrical Shock Hazard

Disconnect power before servicing.  
Replace all panels before operating.  
Failure to do so can result in death  
or electrical shock.

1. Unplug washer or disconnect power.
2. If the valve in this kit is not a direct replacement for the failed valve, you must install the mounting bracket (included with kit) onto the new replacement valve, using screw provided prior to installing the new service valve on your washing machine. See Figure 1.

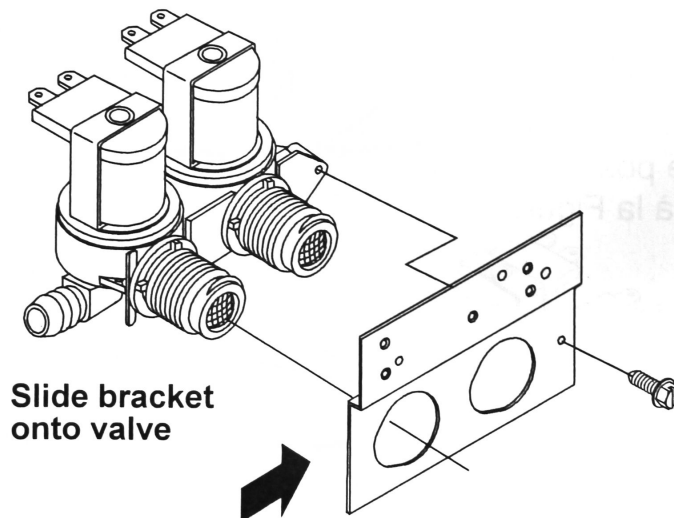


Figure 1

3. Install the new replacement valve assembly with the outlet of the valve positioned the same as the original valve.
4. Connect the "Red" harness lead connector to the "Hot" coil terminal and the other harness lead to the "Cold" coil terminal. **Refer to the "H" and "C" markings on the rear panel of your washer.**

**NOTE:** The harness lead with the red connector will always connect to the "HOT" water side of the valve as identified on the rear panel with the letter "H."