

1. PRODUCT SUMMARY

The Primex Low-Profile Wall Cap (WC28) is built for the exhaust of dryers, bathroom/kitchen fans, stove vents, and intake for furnaces, fresh air make-up, and attic venting.

The standard configuration of the WC28 comes with a removable screen and damper. The 4 to 8-inch adapters are sold separately.

2. PRODUCT DIMENSIONS

HOOD SIZE: H: 10"/W: 10.6"/D: 4.6"

3. FEATURES & BENEFITS


- Enhances aesthetics with low profile that blends in with wall.
- Maximize inventory turns with single hood size and separate 4 to 8 inch easy snap-in adapters.
- Excellent for areas with high wind.
- Eliminates leaky joints and maximizes water protection with one-piece, molded hood.
- Oversized flange ensures watertight installation.
- Long-lasting durability with UV-protected, impactresistant Polymer resin.
- Intake/exhaust conversion via removable damper.

NOTE: For dryer applications use 'no screen' (NS) model.

4. COLOURS

- Black (25)
- Dark Brown (68)
- Dark Grey (28)
- Light Grey (31)
- Snow White (01)
- Tan (45)
- Taupe (23)
- Light Grey (31)





FOR MORE INFORMATION CONTACT:

20160 92A Avenue Langley BC V1M 3A4 Canada

1.877.881.7875


1 info@primexfits.com primexfits.com



5. SIZING/PART NUMBER

LOW-PROFILE ROOF VENT/WALL CAP				
PART NUMBER	SIZE	FREE AREA	DESCRIPTION	PKG
WC28	7.5" x 7.25" x 9.38"	27.8 sq. in.	Wall Cap: intake/exhaust vent w/screen	6/box
WC28NS	7.5" x 7.25" x 9.38"	40.3 sq. in.	Wall Cap: intake/exhaust vent w/o screen	6/box
ADAPTER				
PART NUMBER	SIZE	FREE AREA	DESCRIPTION	PKG
RV28-4	4" diameter	12.6 sq. in.	Duct adapter: 4"	30/pkg
RV28-5	5" diameter	19.6 sq. in.	Duct adapter: 5"	30/pkg
RV28-6	6" diameter	27.8 sq. in. 28.3 NS	Duct adapter: 6"	25/pkg
RV28-7	7" diameter	27.8 sq. in. 38.5 NS	Duct adapter: 7"	25/pkg
RV28-8	8" diameter	27.8 sq. in. 40.3 NS	Duct adapter: 8"	18/pkg

6. TECHNICAL DRAWINGS

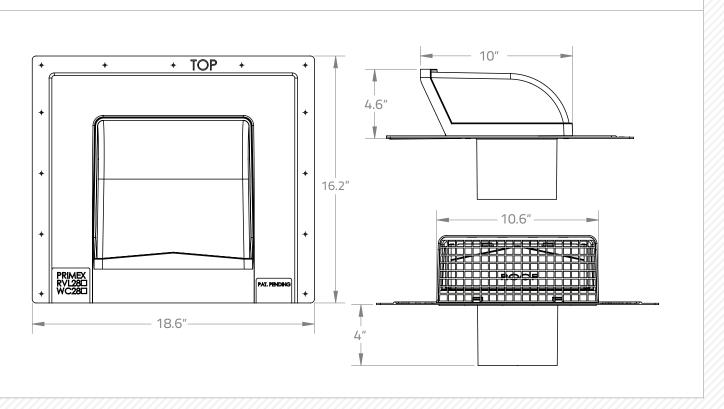



20160 92A Avenue Langley BC V1M 3A4 Canada

1 1.877.881.7875

1 info@primexfits.com primexfits.com

