

Date: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_  
 Name of distributor: \_\_\_\_\_  
 Client #: \_\_\_\_\_  
 Name of end user: \_\_\_\_\_

## ORDERING INFORMATION

Order code: 65613  
 Description: LED/A19/S2/12W/27K/3WAY/STD  
 UPC: 69549656130  
 Case quantity: 48

## PERFORMANCE DATA

Shape: A19  
 Base: E26  
 Wattage (W): 3 / 9 / 12  
 Lamp voltage (VAC): 120  
 Colour temperature (K)\*\*: 2 700  
 Average life (L70 hours): 25 000  
 Initial lumens (lm)\*: 280 / 950 / 1 200  
 Initial lumens per watt (lm/W): 93 / 106 / 100  
 CRI: 81  
 Beam angle: 220  
 Power factor: 0.97  
 Operating temperature range: - 20 °C / - 4 °F to 45 °C / 113 °F

\*Initial lumens range: +/- 10 %


\*\*Typical colour temperature range: +/- 5 %



This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.

## CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electrical shock – do not use where directly exposed to water or weather.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Added weight of the device may cause instability of a freestanding portable luminaire.
- Use only on 120 VAC, 60Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Not for use with dimmers.
- For complete warranty information visit [www.standardpro.com](http://www.standardpro.com).

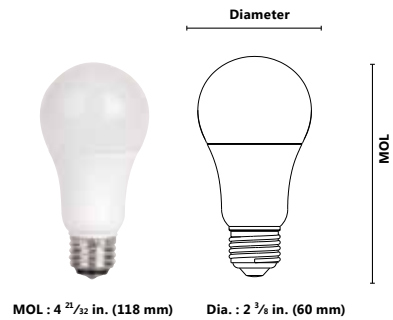

Qty	Description	Price

I accept the specifications of the lamp configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment and representative of relative performance.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

March, 2017

**STANDARD**<sup>®</sup>