



# LED Linear


Our linear line is the best choice to replace traditional fluorescent strip luminaires with our integrated LED solution. Modernize your application with these efficient alternatives to traditional technology.

# LED Striplight


These high quality luminaires are equipped with a frost lens that diffuses the light comfortably. This series is a great option for retrofitting your traditional fluorescent linear luminaires to balance performance, aesthetics, and cost.



| Order code | Description                       | Watts (W) | Volts (VAC) | Colour temp. (K) | Lumen output (lm) | CRI | Life L70 (hrs) | Case qty (master) |
|------------|-----------------------------------|-----------|-------------|------------------|-------------------|-----|----------------|-------------------|
| <b>2'</b>  |                                   |           |             |                  |                   |     |                |                   |
| 65034      | LSS/2FT/20W/40K/120-277/STD       | 20        | 120-277     | 4 000            | 2 600             | 80  | 100 000        | 6                 |
| <b>4'</b>  |                                   |           |             |                  |                   |     |                |                   |
| 66082      | LSS/4FT/32W/40K/120-277/A1/STD    | 32        | 120-277     | 4 000            | 4 224             | 80  | 100 000        | 6                 |
| 66170      | LSS/S2/4FT/40W/40K/120-277/A1/STD | 40        | 120-277     | 4 000            | 5 200             | 80  | 100 000        | 6                 |
| 66172      | LSS/4FT/40W/40K/347/A1/STD        | 40        | 347         | 4 000            | 5 240             | 80  | 54 000         | 6                 |
| <b>8'</b>  |                                   |           |             |                  |                   |     |                |                   |
| 66127      | LSS/8FT/65W/40K/120-277/A1/STD    | 65        | 120-277     | 4 000            | 8 580             | 80  | 100 000        | 1                 |
| 66171      | LSS/S2/8FT/75W/40K/120-277/A1/STD | 75        | 120-277     | 4 000            | 9 750             | 80  | 100 000        | 1                 |
| 66173      | LSS/8FT/75W/40K/347/A1/STD        | 75        | 347         | 4 000            | 9 825             | 80  | 54 000         | 1                 |

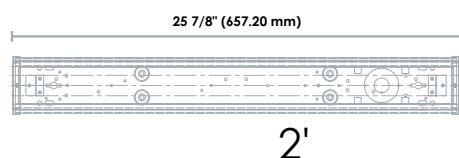


2'

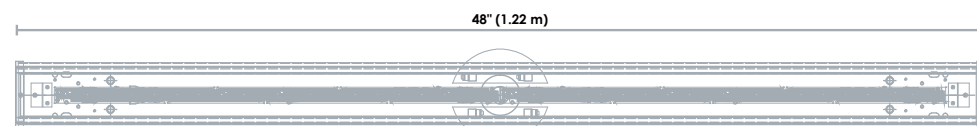

4'



8'




2', 4', 8'

90

## Accessories

| Order code | Description            | Type                    | Compatible with                                 |
|------------|------------------------|-------------------------|---|
| 66084      | LSS/ACC/2FT/LENS/STD   | Replacement lens for 2' | 65034   |
| 66085      | LSS/ACC/4FT/LENS/STD   | Replacement lens for 4' | 66082, 66127, 66170, 66171, 66172, 66173        |
| 66086      | LSS/ACC/VHOOKCHAIN/STD | Hanger kit              | 65034, 66082, 66127, 66170, 66171, 66172, 66173 |
| 66741      | LST4/ACC/WG/STD        | 4' Wireguard            | 66082, 66170, 66172                             |
| 66742      | LST8/ACC/WG/STD        | 8' Wireguard            | 66127, 66171, 66173                             |

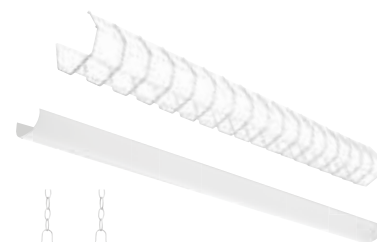

Lumen values are derived from photometric testing  
For a complete list of compatible dimmers and DLC qualified products, please visit [www.standardpro.com](http://www.standardpro.com)

# Tri-Level Programmable Striplight

This tri-level programmable striplight has been designed to prevent energy loss in applications or spaces that require continuous lighting.


The luminaire increases energy savings while allowing users to wisely manage levels of luminosity in a given space. It features an integrated micro-wave motion sensor that regulates light levels according to occupancy of the space

## Tri-Level programmable means:

- Detection of occupancy
- Detection of light levels in the room
- Dimming control of each individual light




| Order code | Description                         | Watts (W) | Volts (VAC) | Colour temp. (K) | Lumen output (lm) | CRI | Life L70 (hrs) | Sensor type | Case qty (master) |
|------------|-------------------------------------|-----------|-------------|------------------|-------------------|-----|----------------|-------------|-------------------|
| 66083      | LSS/4FT/TLEV/32W/40K/120-277/A1/STD | 32        | 120-277     | 4 000            | 4 160             | 80  | 50 000         | Microwave   | 6                 |
| 66081      | LSS/4FT/TLEV/40W/40K/120-277/A1/STD | 40        | 120-277     | 4 000            | 5 200             | 80  | 50 000         | Microwave   | 6                 |

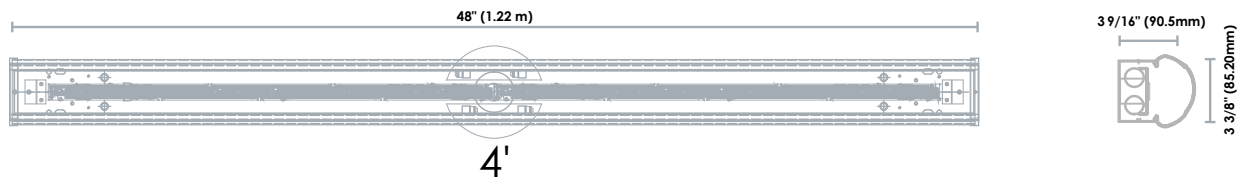

## Accessories

| Order code | Description            | Type                    | Compatible with |
|------------|------------------------|-------------------------|-----------------|
| 66085      | LSS/ACC/4FT/LENS/STD   | Replacement lens for 4' | 66081, 66083    |
| 66086      | LSS/ACC/VHOOKCHAIN/STD | Hanger kit              | 66081, 66083,   |
| 66741      | LST4/ACC/WG/STD        | 4' Wireguard            | 66081, 66083    |

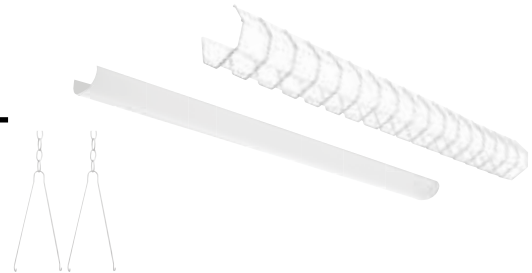

Lumen values are derived from photometric testing  
For a complete list of compatible dimmers and DLC qualified products, please visit [www.standardpro.com](http://www.standardpro.com)






# LED Shoplight



STANDARD's 4 foot LED Shoplight consumes at least 48 % less energy than it's traditional counterpart. It is equipped with a 5 foot cable with a direct plug-in and an ON/OFF pull chain.

90

| Order code | Description                 | Watts<br>(W) | Volts<br>(VAC) | Colour temp.<br>(K) | Lumen output<br>(lm) | CRI | Life<br>L70<br>(hrs) | Traditional equivalent<br>(W)<br>Fluo | Case qty<br>(master) |
|------------|-----------------------------|--------------|----------------|---------------------|----------------------|-----|----------------------|---------------------------------------|----------------------|
| 65971      | LSHOP/S2/40W/40K/120/ND/STD | 40           | 120            | 4 000               | 4 000                | 80  | 54 000               | 2x32 W T8                             | 4                    |

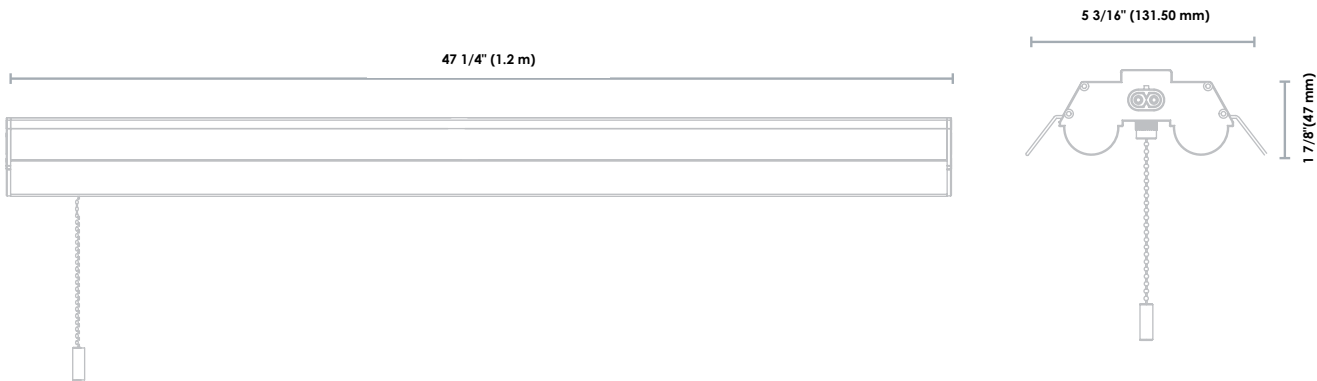

Lumen values are derived from photometric testing  
For a complete list of ENERGY STAR qualified products, please visit [www.standardpro.com](http://www.standardpro.com)





# LED Wrap




34 W




42 W

06

| Order code | Description                    | Watts (W) | Volts (VAC) | Colour temp. (K) | Lumen output (lm) | CRI | Life L70 (hrs) | Case qty (master) |
|------------|--------------------------------|-----------|-------------|------------------|-------------------|-----|----------------|-------------------|
| 66174      | LSW/4FT/34W/40K/120-277/A1/STD | 34        | 120-277     | 4 000            | 4 420             | 80  | 50 000         | 4                 |
| 66261      | LWR4/120-277/42W/40K/FR/A2/STD | 42        | 120-277     | 4 000            | 4 288             | 80  | 50 000         | 4                 |

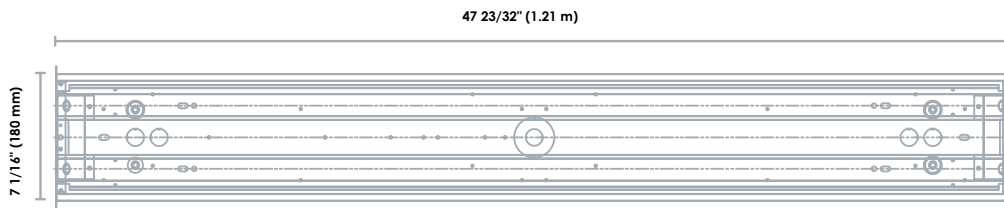

34 W

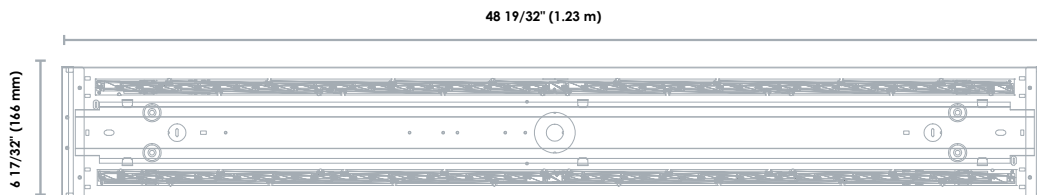

42 W



DIMMABLE



DAMP




5 YEARS WARRANTY



Lumen values are derived from photometric testing  
For a complete list of DLC qualified products, please visit [www.standardpro.com](http://www.standardpro.com)


# LED Vapor tight

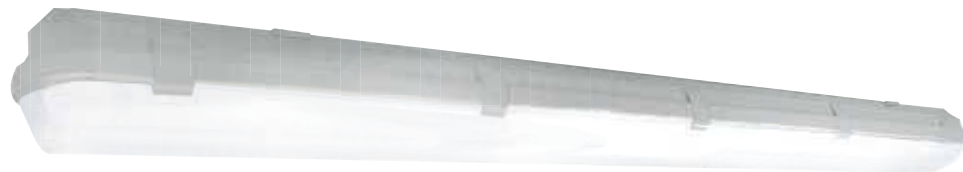


The LSV Vapor Tight series is an enclosed luminaire that combines state-of-the-art LED technology with an IP rated vapor tight housing. This luminaire is protected against extreme temperatures, the intrusion of dust and jets of waters projected from any direction. Its durable construction provides protection against harsh environmental conditions and corrosion.

- Impact resistant polycarbonate construction
- Integrated durable gasket that seals the entire enclosure
- UV stabilized lens

| Order code         | Description                         | Watts<br>(W) | Volts<br>(VAC) | Colour temp.<br>(K) | Lumen output<br>(lm) | CRI | Life<br>L70<br>(hrs) | Case qty<br>(master) |
|--------------------|-------------------------------------|--------------|----------------|---------------------|----------------------|-----|----------------------|----------------------|
| <b>Traditional</b> |                                     |              |                |                     |                      |     |                      |                      |
| 65058              | LSV/S2/60W/40K/2/DD1/FP/STD         | 60           | 120-277        | 4 000               | 7 500                | 80  | 80 000               | 6                    |
| 65059              | LSV/S2/60W/40K/3/DD1/FP/STD         | 60           | 347            | 4 000               | 7 900                | 80  | 80 000               | 6                    |
| <b>Narrow</b>      |                                     |              |                |                     |                      |     |                      |                      |
| 66196              | LSV/N/35W/40K/120-277/DD1/FP/A1/STD | 35           | 120-277        | 4 000               | 4 550                | 80  | 50 000               | 4                    |
| 66198              | LSV/N/35W/40K/347/DD1/FP/A1/STD     | 35           | 347            | 4 000               | 4 550                | 80  | 50 000               | 4                    |
| 66197              | LSV/N/40W/40K/120-277/DD1/FP/A1/STD | 40           | 120-277        | 4 000               | 5 200                | 80  | 50 000               | 4                    |
| 66199              | LSV/N/52W/40K/347/DD1/FP/A1/STD     | 52           | 347            | 4 000               | 6 760                | 80  | 50 000               | 4                    |

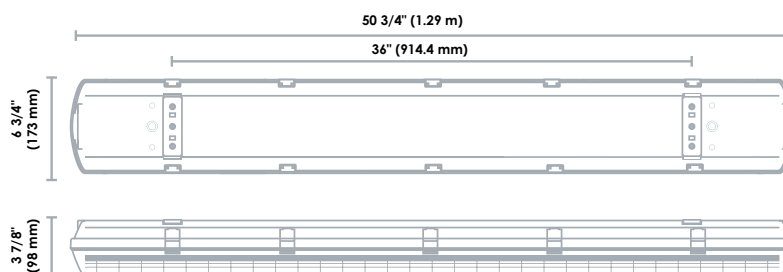

Traditional

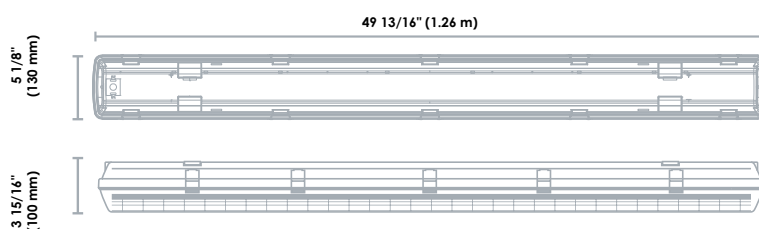

Narrow

## Accessory

| Order code | Description                       | Type       | Compatible with     |
|------------|-----------------------------------|------------|---------------------|
| 64187      | FPV/LSV/STAINLESS/STEEL/CLIPS/STD | Steel clip | 65056, 65057, 65058 |



Lumen values are derived from photometric testing  
For a complete list of compatible dimmers and DLC qualified products,  
please visit [www.standardpro.com](http://www.standardpro.com)





# LED Tri-proof

The LSVS Tri-Proof series is highly resistant to heavy impacts (IK10), water jets (IP66), dust, and temperature variations. This luminaire balances high performance lighting while providing minimum glare.



| Order code | Description                    | Watts (W) | Volts (VAC) | Colour temp. (K) | Lumen output (lm) | CRI | Life L70 (hrs) | Case qty (master) |
|------------|--------------------------------|-----------|-------------|------------------|-------------------|-----|----------------|-------------------|
| <b>2'</b>  |                                |           |             |                  |                   |     |                |                   |
| 64922      | LSVS/20W/2FT/40K/2/ND/FP/L/STD | 20        | 120-277     | 4 000            | 1 900             | 80  | 63 000         | 6                 |
| <b>4'</b>  |                                |           |             |                  |                   |     |                |                   |
| 64923      | LSVS/40W/4FT/40K/2/ND/FP/L/STD | 40        | 120-277     | 4 000            | 4 909             | 80  | 63 000         | 6                 |
| 64924      | LSVS/40W/4FT/40K/3/ND/FP/L/STD | 40        | 347         | 4 000            | 4 909             | 80  | 63 000         | 6                 |

2 1/2" (63 mm)



23 5/8" (600 mm)



3 1/4" (83 mm)

2'

2 1/2" (63 mm)



47 1/4" (1.2 m)



3 1/4" (83 mm)

4'

## Accessory

| Order code | Description         | Type         |
|------------|---------------------|--------------|
| 64175      | LSVS/ACC/AIRCAB/STD | Steel cables |




## Included in the box

Connectors for linkable mounting

Mounting clips: one set per luminaire

One 6 ft (183 cm) cable, with one set of connectors at each end



NON-DIMMABLE



RATING



OUTDOOR



WET



PRORATED WARRANTY



Lumen values are derived from photometric testing  
For a complete list of DLC qualified products, please visit [www.standardpro.com](http://www.standardpro.com)