


ORDERING INFORMATION

Order code: 64244
 Description: LED/MR11/4W/30K/38/GU4/ND/STD
 UPC: 69549642447
 Case quantity: 48

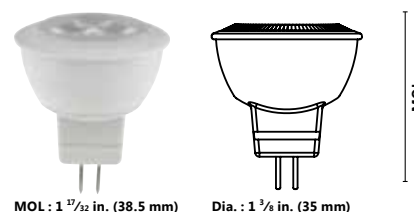


PERFORMANCE DATA

Shape: MR11
 Base: GU4
 Wattage (W): 4
 Lamp voltage (VAC): 12
 Colour temperature (K)**: 3 000
 Average life (L70 hours): 25 000
 Initial lumens (lm)*: 260
 Initial lumens per watt (lm/W): 65
 CRI: 80
 Beam angle: 38
 Power factor: 0.7
 Operating temperature range: - 20 °C / - 4 °F to 45 °C / 113 °F

*Initial lumens range: +/- 5 %

**Typical colour temperature range: +/- 5 %

BEAM SPREAD

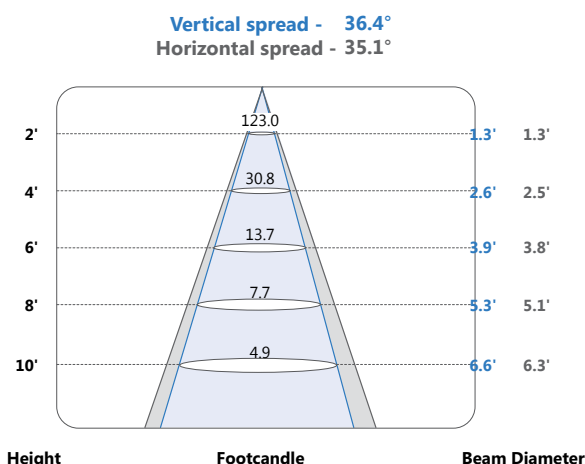

TRANSFORMER COMPATIBILITY

STANDARD	Model	Power Rating (W)	Type	Lamp per transformer (no dimmer connected)					
				1	2	3	4	5	6
	61951	12	ET	N	N	N	N	N	N

TCD POWER	Model	Power Rating (W)	Type	Lamp per transformer (no dimmer connected)					
				1	2	3	4	5	6
	DA-50-12TH5	12	MT	N	N	N	N	N	N

CONTRAST LIGHTING	Model	Power Rating (W)	Type	Lamp per transformer (no dimmer connected)					
				1	2	3	4	5	6
	MLV-EC50M	12	MT	N	N	N	N	N	N

CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electrical shock – do not use where directly exposed to water or weather.
- Suitable for use in open fixtures.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Use only on 12 VAC, 60Hz circuits.
- Lamp may not be compatible with all low voltage transformers.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Not for use with dimmers.
- For complete warranty information visit www.standardpro.com.
- Operating temperature: -20 °C / -4 °F to 45 °C / 113 °F
- 3 Years Limited Warranty.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

November 25, 2015

STANDARD®