

**COLONY® PRO
DUAL CONTROL BAR FAUCET**


Thank you for selecting American Standard...
the benchmark of fine quality for over 100 years.

To ensure that your installation proceeds smoothly-please
read these instructions carefully before you begin.



Certified to comply with ANSI A112.18.1M

RECOMMENDED TOOLS




Adjustable Wrench



Channel Locks



Plumbers' Putty
or Caulking




Phillips Screwdriver

1 INSTALL FAUCET


CAUTION Turn off hot and cold water
supplies before beginning.

- Install FAUCET (1) on lavatory. (No sealant is required unless mounting deck on lavatory is uneven).

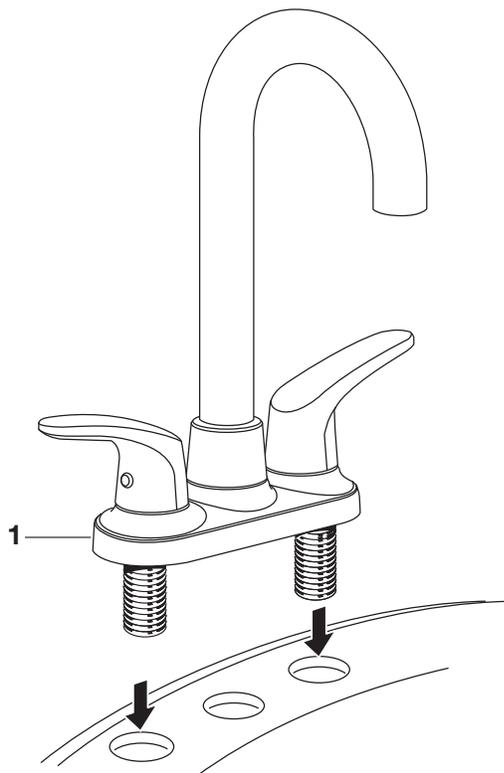


**2 SECURE FAUCET AND MAKE WATER
SUPPLY CONNECTIONS**

- **NOTE: Flexible supplies have to be purchased separately.**
- Secure FAUCET (1) with ATTACHMENT NUTS (2) supplied. (HAND TIGHTEN).
- Connect water supply to FAUCET (1) with 1/2" IPS FLEXIBLE SUPPLIES (3) or 3/8" O.D. BULL-NOSE RISERS (4). Use adjustable wrench to tighten connections. Do not over tighten. Be careful not to kink copper supply when bending. Use tubing cutter to cut to proper length.

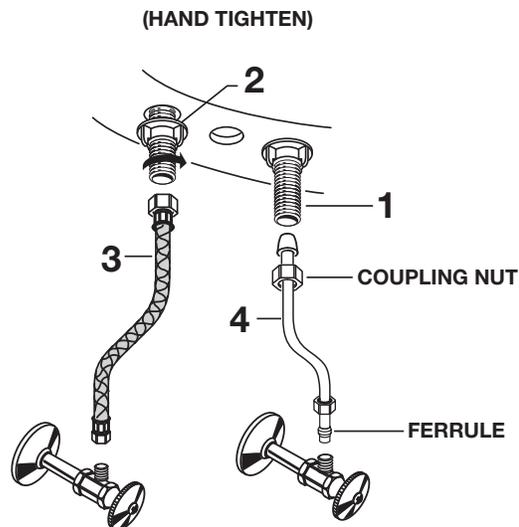

3 TEST INSTALLED FAUCET

- Remove AERATOR. With handles in OFF position, turn on water supplies and check all connections for leaks.
- Operate both handles to flush water lines thoroughly. Replace AERATOR.

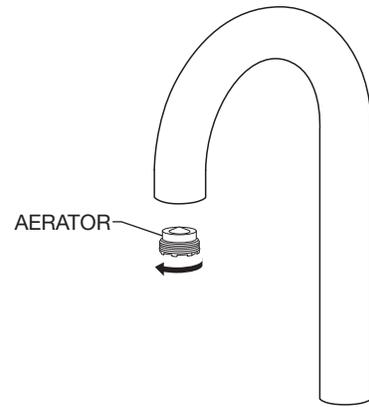

4 SERVICE **CAUTION** Turn off hot and cold water supplies before beginning.

If Faucet Drips, Proceed As Follows:


- Turn HANDLES to OFF position.
- If spout drips, operate HANDLES several times from OFF to ON position. Do not force HANDLES they turn only 90°.
- AERATOR may accumulate dirt causing distorted and reduced water flow. Remove AERATOR and clean before reinstalling.

Change Handle Direction:

- Remove Plug BUTTON (1), loosen SET SCREW (2) and LIFT UP HANDLE (3).
- Remove Plastic Adapter (4) and cartridge nut (5).
- Lift and turn STOP WASHER 90°.
- Re-install HANDLE components.

To Change Cartridge:

- Remove Plug BUTTON (1), loosen SET SCREW (2) and LIFT UP HANDLE (3).
- Remove Plastic Adapter (4) and cartridge nut (5).
- Lift CARTRIDGE (6) off Port (7).
- Clean CARTRIDGE (6) port.
- Place CARTRIDGE (6) onto Port (7) and tighten Cartridge Nut (5) alternately.
- Replace Plastic Adapter (4), HANDLE (3), tighten SET SCREW (2) and install INDEX BUTTON (1).

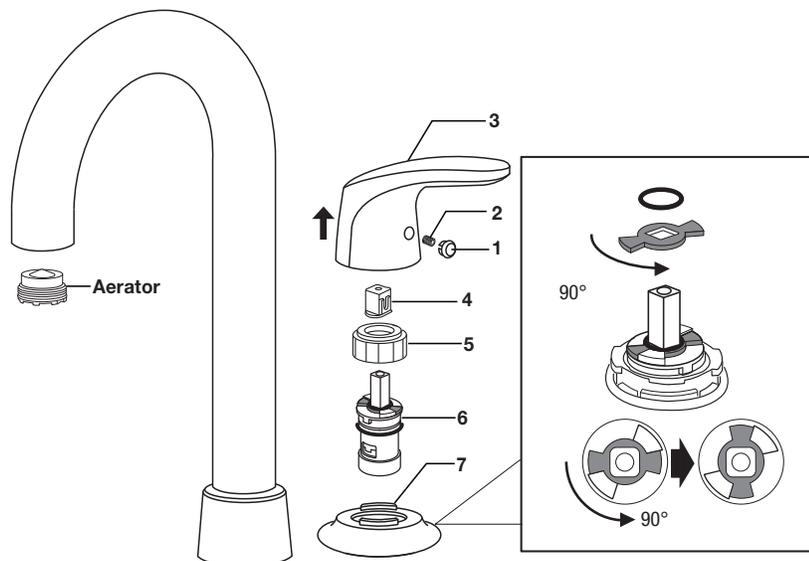

6 CARE INSTRUCTIONS:

- DO: SIMPLY RINSE THE PRODUCT CLEAN WITH CLEAR WATER. DRY WITH A SOFT COTTON FLANNEL CLOTH.**
- DO NOT: DO NOT CLEAN THE PRODUCT WITH SOAPS, ACID, POLISH, ABRASIVES, HARSH CLEANERS, OR A CLOTH WITH A COARSE SURFACE.**

American Standard


**COLONY® PRO
DUAL CONTROL
BAR FAUCET**

MODEL NUMBER

7074.400

M970226-YYY0A
HANDLE
(LEFT & RIGHT)

M964323-0070A
PLUG BUTTON



M922923-0070A
AERATOR

M970215-YYY0A
SPOUT KIT

M964005-0070A
CARTRIDGE KIT

M970216-0070A
SPOUT SEAL KIT

Replace the "YYY" with
appropriate finish code

POLISHED CHROME	002
STAINLESS STEEL	075

M970217-YYY0A
ESCUTCHEON &
PUTTY PLATE

065800-0070A
ATTACHMENT NUT

HOT LINE FOR HELP

For toll-free information and answers to your questions, call:
1 (800) 442-1902

Mon. - Fri. 8:00 a.m. to 8:00 p.m. EST

Saturday 10:00 a.m. to 4:00 p.m. EST

IN CANADA 1-800-387-0369

(TORONTO 1-905-306-1093)

Weekdays 8:00 a.m. to 7:00 p.m. EST

IN MEXICO 01-800-839-1200



PART OF **LIXIL**