


Pfirst Series™ Single Control Lavatory Faucet

LG142-0600 Finish(C) ☐

LG142-060K Finish(K) ☐



Specifications

Features

- 1.2 GPM Flow Rate
- Optional 3-Hole Deckplate 961-217* (Order Separately)
- Push & Seal™ Drain Included
- Pre-Drilled and Plugged for Standard Pop-up (Order Pop-Up Separately)
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

- Pforever Seal
- Push & Seal™ Pop-Up



Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:


- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- Cal Green Compliant
- CEC Compliant
- NSF 61/9 Annex G (Low lead)
- EPA WaterSense Certification 1.2 gpm, 4.5 L/Min
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

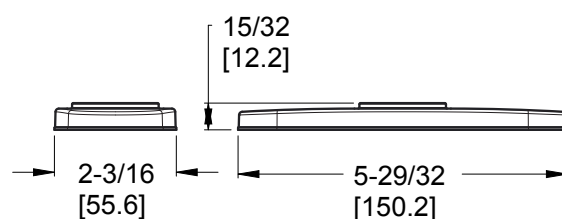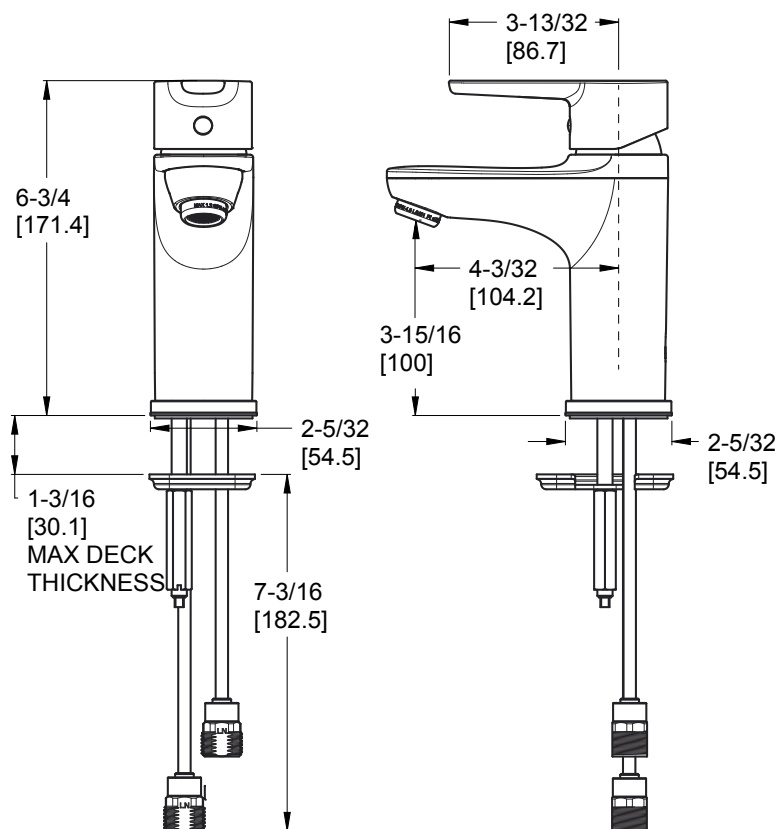

Optional Deck and Putty Plate

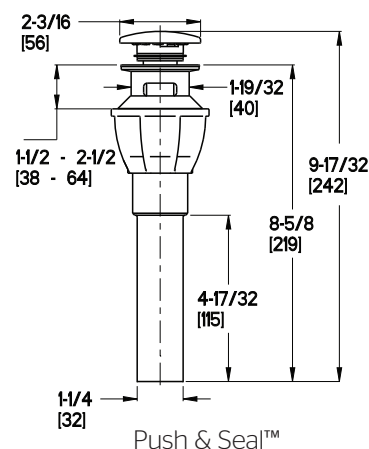

Push & Seal™

Ø1 Min to Ø1-1/2 Max. Deck Hole Openings