American Standard

# SERIN™ 60" x 32" INTEGRAL APRON BATHING POOL

HIGH GLOSS ACRYLIC

#### SERIN™ 60" x 32" INTEGRAL APRON BATHING POOL

- □ 3586 102 Right Hand Outlet
- **3586 202** Left Hand Outlet (Illustrated)

#### **Product Features:**

- · High Gloss Acrylic with fiberglass reinforcement
- Integral apron
- Integral three-sided, double tiling/water retention flange
- · Safety-textured tub bottom pattern

Nominal Dimensions: 60" x 32" x 24" (1524 x 813 x 610mm)

## Compliance Certifications -Meets or Exceeds the Following Specifications:

- CAN/CSA B45 Series
- CAN/ULC-S102 Flame Spread and Smoke Developed



### To Be Specified - Required:

- □ Colour: (specify colour)
- □ Bath Faucet\* (specify finish)
- □ Universal Drain: 1583 470 (specify finish)

\* See faucet section for models available


**NOTE:** This bathtub is designed to be installed above finished floor level

NOTE: Roughing-in dimensions and product specifications shown on reverse side of page.

# American Standard

SERIN™ 60" x 32" INTEGRAL APRON BATHING POOL

HIGH GLOSS ACRYLIC

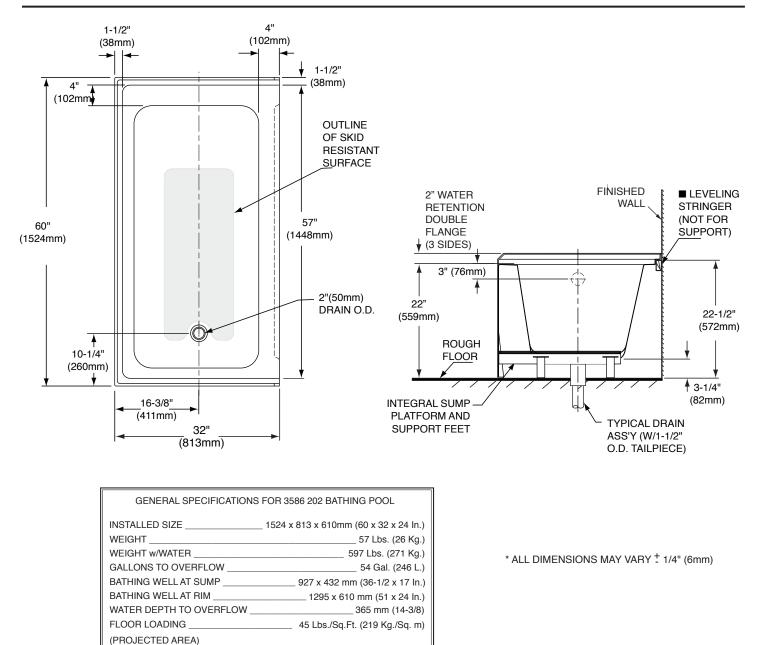

NOTES:

PTS.

CUBE (Ft<sup>3</sup>)

- BATH CAN BE INSTALLED ABOVE FLOOR LINE AS A RECESS INSTALLATION. SUMP OF BATH IS SUPPORTED BY 4 FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.
- IF INSTALLING A DECK-MOUNTED FAUCET, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH DRAIN OVERFLOW. MOUNTING HOLES DRILLED BY INSTALLER.

15.6

29.1

LEFT HAND OUTLET SHOWN, RIGHT HAND REVERSE DIMENSIONS. (3586 102). SHOWN WITH DRAIN AND OVERFLOW.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.