

Date: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_  
 Name of distributor: \_\_\_\_\_  
 Client #: \_\_\_\_\_  
 Name of end user: \_\_\_\_\_

## ORDERING INFORMATION

Order code: 64415  
 Description: LED/GU10/6.5W/27K/25/STD  
 UPC: 69549644151  
 Case quantity: 24

## PERFORMANCE DATA

Shape: MR16  
 Base: GU10  
 Wattage (W): 6.5  
 Lamp voltage (VAC): 120  
 Colour temperature (K)\*\*: 2 700  
 Average life (L70 hours): 40 000  
 Initial lumens (lm)\*: 558  
 Initial lumens per watt (lm/W): 86  
 CRI: 82  
 Beam angle (°): 25  
 CBCP: 2 451  
 Power factor: 0.9  
 Operating temperature range: - 40 °C / - 40 °F to 40 °C / 104 °F

\*Initial lumens range: +/- 10 %

\*\*Typical colour temperature range: +/- 10 %



DIMMABLE



DAMP



NO MERCURY



COMPLIANT



WARRANTY




UL US



FCC



ENERGY STAR

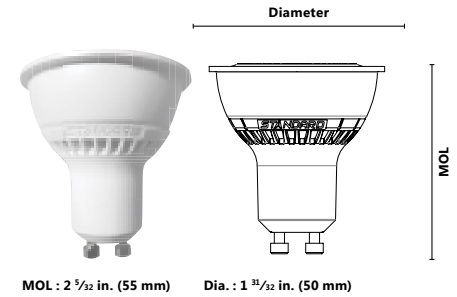

## COMPATIBLE DIMMER LIST

|                |                               |
|----------------|-------------------------------|
| <b>Legrand</b> | HCL453P                       |
| <b>Cooper</b>  | DAL06P, SAL06P, SLC03P, AAL06 |
| <b>Leviton</b> | IPL06, 6674, DSM10-1LZ        |
| <b>Lutron</b>  | CTCL-153P                     |

## CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electrical shock – do not use where directly exposed to water or weather.
- Not for use in totally enclosed luminaires.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Compatible with most dimmers.
- For complete dimmer and warranty information visit [www.standardpro.com](http://www.standardpro.com).
- Not recommended for use with timers.
- Operating temperature: -40 °C / -40 °F to 40 °C / 104 °F
- 5 Years Limited Warranty.

| Qty | Description | Price |
|-----|-------------|-------|
|     |             |       |

I accept the specifications of the lamp configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

March 14, 2016

**STANDARD**®