


ORDERING INFORMATION

Order code: 62934
Description: BMH0250/TRITAP/C/CWA/H/K/STD
UPC: 69549629349

SPECIFICATIONS

Ballast type: Magnetic metal halide
Ballast style: Core and coil
Circuit type: CWA
ANSI code: M58 or H37
Input voltage (V): 120/277/347
Input frequency (Hz): 60
Line volt regulation: 10 %
Line watt regulation: 10 %
Insulation class: H (180)

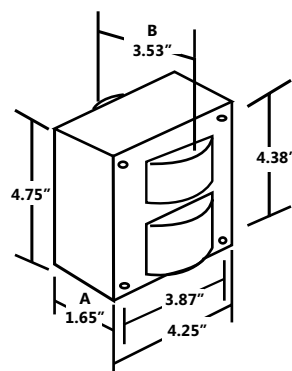

4 1/4" x 4 3/4" Core

Input voltage (V)	Operating current (A)	Open circuit current (A)	Starting current (A)	Rated lamp watts (W)	Input watts (W)	OCV (V)	Dropout voltage (V)	UL 1029 code	Fuse rating (A)	Input current (A)	Power factor	Starting temperature
120	2.55	2.10	1.85	250	290	300	60	C	8	1.35 - 2.10	0.90	-20°F / -30°C
277	1.10	1.00	0.80	250	290	300	138	C	3	0.55 - 0.90	0.90	-20°F / -30°C
347	0.90	0.75	0.65	250	290	300	175	C	3	0.45 - 0.70	0.90	-20°F / -30°C

HIGH POTENTIAL TEST (V)


1 minute:	2 000
2 seconds:	2 500
OCV test:	270 - 330
Short circuit:	2.25 - 2.75

BALLAST DIMENSIONS


Dimension A:	1.65"
Dimension B:	3.53"
Lead lengths:	12" - 14"
Weight (lbs) :	9.26

WIRING DIAGRAM


Ground ballast core

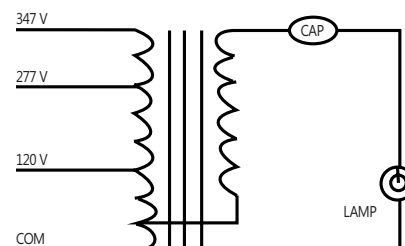

BRACKET

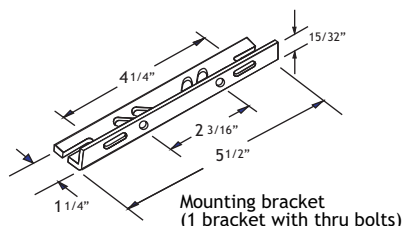

CAPACITOR



Rating: 15 ± 3% Mfd
400 VAC min.
Dry film capacitor
Thermal plastic
Max. case temp.: 90 °C
No PCB'S

