

SLA-2L / SLA12-2L

“EASY OUT” STEEL BATTERY UNIT

FEATURES AND SPECIFICATIONS

• Circuitry

- 120/347 VAC 60 Hz input, field selectable
- High efficiency, rapid recovery, precision control charging system
- 6 VDC 36 W or 12 VDC 72 W emergency power output versions (as specified)
- Momentary push button test switch
- Diagnostic/pilot LED for AC ON and CHARGE
- Fully automatic, current limited charger
- Line latched, low voltage protection
- Solid state design and construction
- Brownout and short circuit protection
- Temperature compensated
- Complete battery recharge in 24 hours
- Maintenance free, sealed lead acid batter

• Mechanical

- 120 VAC line cord supplied standard
- Universal spider knockout pattern and keyhole mounting slots stamped into back of cabinet
- Multiple conduit entry knockouts
- White powder coat finish standard
- PAR18 small style, high impact thermoplastic heads
- LED heads with limited lifetime warranty¹

• Compliances

- CSA Certified to C22.2 #141-15



OVERVIEW

SLA-2L	<ul style="list-style-type: none"> – 6 VDC 36 W Battery Capacity – Over 4 hours Duration Standalone Unit – 2 x 2 W Crisp White LED Heads
SLA12-2L	<ul style="list-style-type: none"> – 12 VDC 72 W Battery Capacity – Over 8 hours Duration Standalone Unit – 2 x 2.5 W Crisp White LED Heads



¹ For complete warranty details, please see our terms and conditions in our website.

QUICK SHIP AND TECHNICAL SPECIFICATION TABLE

Part number	DC Volts (VDC)	Watts (W)	Nbr of heads	Head	Lamp (W)	Light source	Input Volts (VAC)	Color
SLA-2L	6	36	2	N	2	LED	120/347	White
SLA12-2L	12	72	2	N	2.5	LED	120/347	White

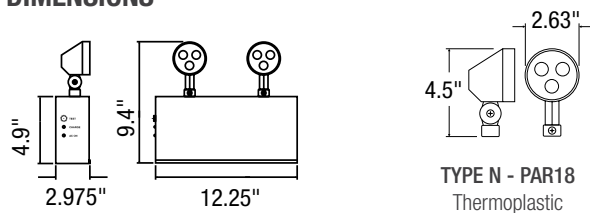
¹ **QUICK SHIP:** Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

MODEL RATINGS

Model	Volts (V)	Wattage capacities (W)			
		30 min.	60 min.	90 min.	120 min.
SLA-2L	6	36	12	12	9
SLA12-2L	12	72	36	24	18

WIREGUARD

Part number	Dimensions (in)
WGD590	15.25x14.25x6.75

DIMENSIONS

SPACING GUIDE

Mounting height	Spacing centear to center (ft)	
	2 W	2.5 W
8 ft	26	41
10 ft	24	37
15 ft	17	38
20 ft	10	21

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.