

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

WTL LED ADJUSTABLE WALL PACK

Selectable color temperature (3 000/4 000/5 000 K)

Power selectable

Integrated photocell

Multi-Voltage (120-347 V)

ORDERING INFORMATION

Order code: 68768
Model number: WTL-PS30A-Q-3C-BR-P
UPC: 069549019096
Case quantity: 8

PHYSICAL DATA

Dimensions: 7.31" x 6.49" x 4.54" (185.8 mm x 164.9 mm x 115.2 mm)
Lens material: Clear polycarbonate lens
Housing material: Die-Cast

PERFORMANCE DATA

Watts (W): 15/30
Volts (VAC): 120-347
Color temperature (K):¹ 3 000/4 000/5 000
Lumen output (lm):² 2 100 - 3 925
Efficiency (lm/W): 137 - 140
CRI: 70
Photocell (Yes/No): Yes
Dimming (Yes/No): Yes
Power factor: ≥0.9
THD (%): ≤20
Frequency (Hz): 50/60
Surge protection (kV): 6
Operating temp. range: -40 to 50 °C

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %




ICES
005



IK07




DIMENSIONS

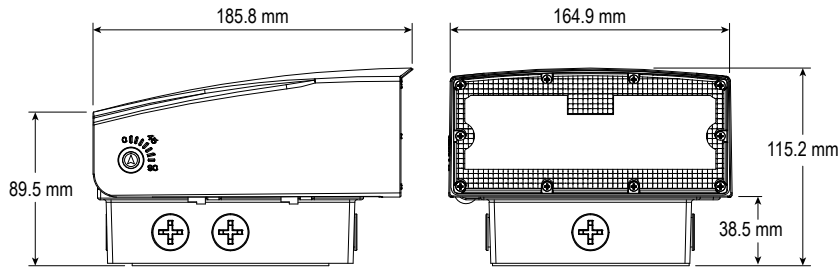

PHOTOMETRIC DATA¹

68768 • WTL-PS30A-Q-3C-P • 15 W • 4 000 K • 2 099 lm

Polar candela distribution

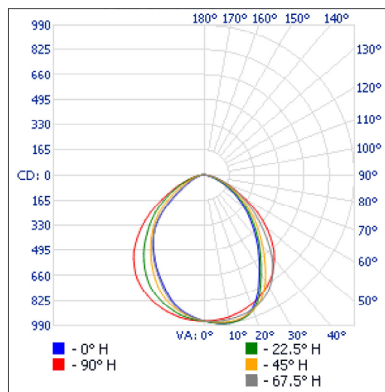

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	729.5	34.8%
0-40	1 152.1	54.9%
0-60	1 835.1	87.4%
60-90	258.1	12.3%
70-100	87.4	4.2%
90-120	1.2	0.1%
0-90	2 093.3	99.7%
90-180	5.7	0.3%
0-180	2 099.0	100%


Illuminance at a distance

Center beam fc	Beam width
8.3'	13.9
16.7'	3.44
25'	1.54
33.3'	0.87
41.7'	0.55
50'	0.38

Vert. spread: 83.7°
Horiz. spread: 100.7°

68768 • WTL-PS30A-Q-3C-P • 30 W • 4 000 K • 3 923 lm

Polar candela distribution

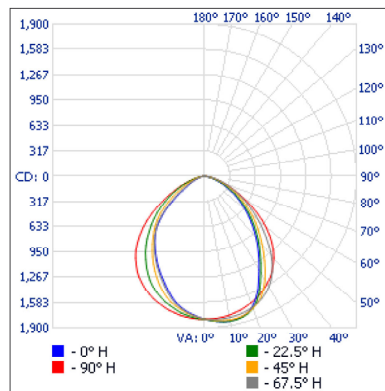

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	1 363.4	34.8%
0-40	2 153.3	54.9%
0-60	3 430.0	87.4%
60-90	482.4	12.3%
70-100	163.3	4.2%
90-120	2.3	0.1%
0-90	3 912.4	99.7%
90-180	10.7	0.3%
0-180	3 923.1	100%

Illuminance at a distance

Center beam fc	Beam width
8.3'	26
16.7'	6.43
25'	2.87
33.3'	1.62
41.7'	1.03
50'	0.72

Vert. spread: 83.7°
Horiz. spread: 100.7°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.