

### DESCRIPTION

- Chrome plated metal construction
- 1/2" IPS connections
- Supplied with vandal resistant screws

### OPERATION

- Wrist-Blade style handles with hot and cold color indicators
- Hot side counterclockwise (1/4) turn to open (clockwise to close)
- Cold side clockwise (1/4) turn to open (counter-clockwise to close)

### FLOW

- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
  - ° 1.2 gpm max (4.5L/min) at 60 psi

### CARTRIDGE


- 1224 cartridge design
- Nonmetallic and stainless steel construction

### STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal SafeDrinking Water Act
- **ADA**  for lever handles

### WARRANTY

- Warranted for 5 years against material or manufacturing defects

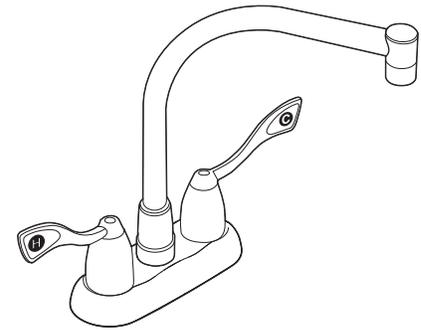


**Two-Handle Bar Faucet**

**Model: 8940**



**NOTE:** This faucet is designed to be installed through 2 holes, 1" min. dia. and 4" on center

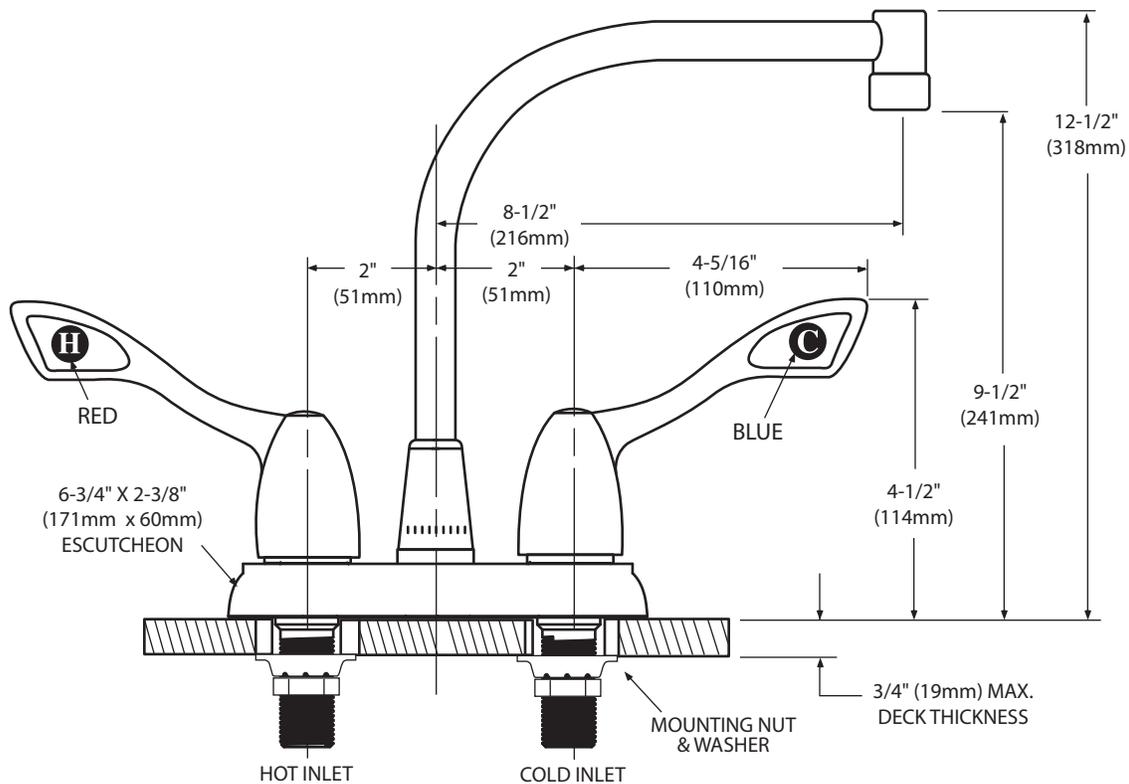

## CRITICAL DIMENSIONS

(DO NOT SCALE)