


Submitted Model No.: _____

Specific Features: _____

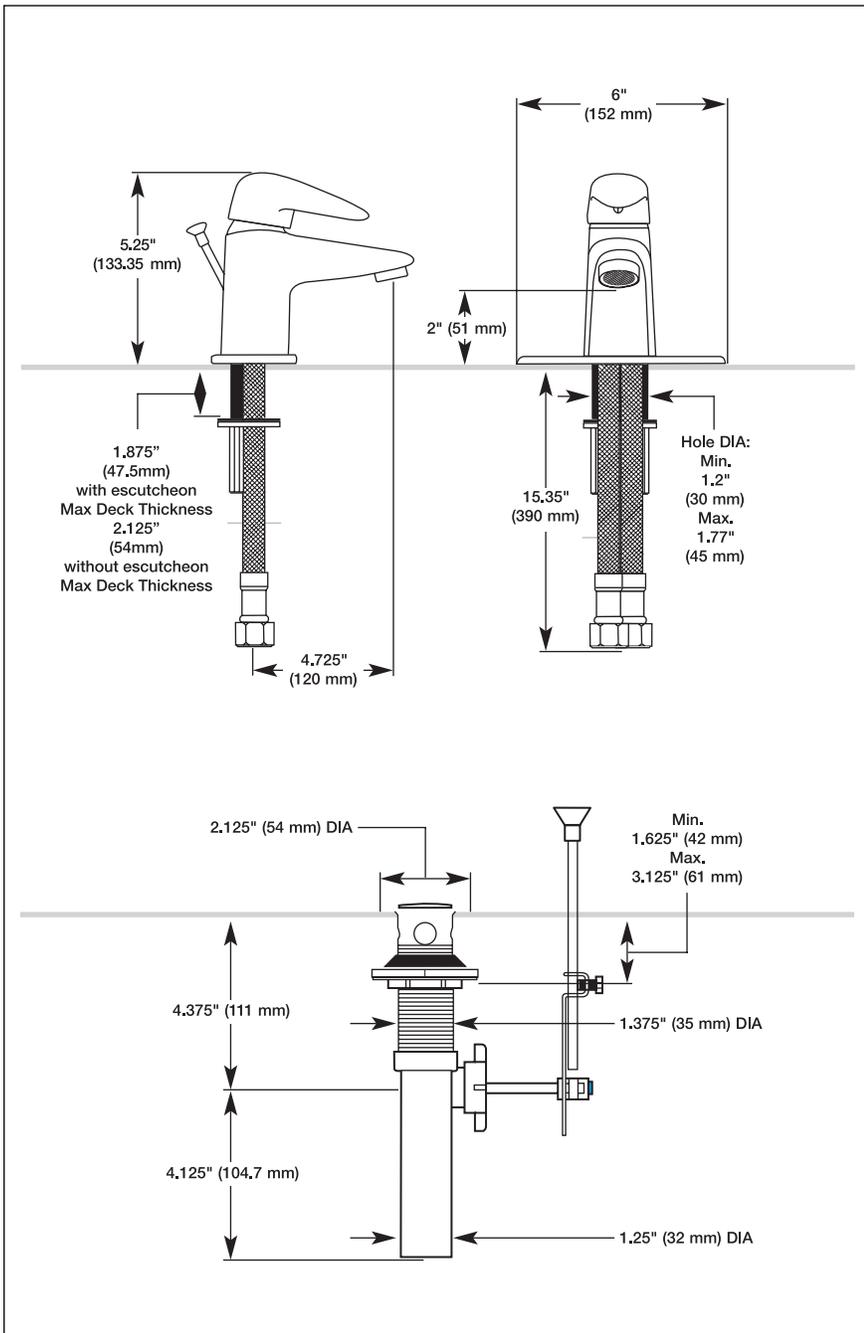

LAVATORY FAUCETS

- Spree™ Series
- Single Handle
- Deck Mount
- 1 or 3 Hole Sink Applications
- 4" Centerset

STANDARD SPECIFICATIONS:

- 4" (102 mm) Single Handle Lavatory Faucet.
- Polished chrome plate finish.
- Ceramic cartridge with high temperature rotational limit stop.
- Cast centerset with 50/50 Pop-Up.
- 1 or 3 hole installation.
- 4.725" (120 mm) long reach on spout.
- Maximum 2.13" (54 mm) deck thickness.
- Colour coded plug button on handle for hot/cold identification.
- Handle: 3.82" (97 mm) lever handle – ADA compliant-colour indexed.
- Maximum flow rate: 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.



COMPLIES WITH:

- CSA certified
- ASME A112.18.1/CSA B125.1
- ASME A112.18.2/CSA B125.2
- Indicates ADA compliance to ICC/ANSI A117.1
- EPA WaterSense – *532LF-WF only.
- Verified compliant with 0.25% weighted average Pb content regulations.



55 E. 111th Street, Indianapolis, Indiana 46280
 350 South Edgeware Road, St. Thomas, ON N5P 4L1
 © 2013 Masco Corporation of Indiana

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-L-532LF-WF