

## PRMPS-2

### "EASY OUT" PLASTIC COMBO RUNNING MAN

(120 min duration standalone unit)

2 x 2.4 W LED heads

The PRMPS-2 commercial plastic combination running man sign is suitable for property management and institutional applications and is designed using durable and lightweight high impact thermoplastic. It comes with a quick snap canopy, two 2.4 W LED heads and runs for 120 min as a standalone unit.

#### FEATURES AND SPECIFICATIONS

##### • Electrical circuitry

- LED ultra bright light source
- 120/347 VAC Input, field selectable
- Power consumption:  
**120 V** = 0.053A/6.61 W;  
**347 V** = 0.020A/6.55 W
- Discharge time of 120 minutes
- Lead acid battery
- Two 2.4 W LED heads

##### • Mechanical

- High impact, UV stabilized, thermoplastic construction
- Good for damp location
- White color is standard
- Temperature compensated

##### • Approvals

- Meets requirements of ICES-005
- CSA Certified to C22.2 #141-15
- CSA Certified to C860-11

#### OVERVIEW

Light source	LED
Input voltage (VAC)	120 / 347
Power consumption	120 V = 0.053A/6.61 W 347 V = 0.020A/6.55 W



quick  
ship



LED  
fixture



ICES  
005



Energy Verified  
Energie Vérifiée

**QUICK SHIP TECHNICAL SPECIFICATION TABLE**

Part number	DC Volts (VDC)	Watts (W)	Nbr of faces	Nbr of heads	Head	Lamp (W)	Light source	Input Volts (VAC)	Color
PRMPS-2	N/A	N/A	Universal	2	N	2.4	LED	120/347	White

<sup>1</sup> **QUICK SHIP:** Not all products are Quick Ship. To view our Quick Ship qualified products, please consult our Quick Ship Product Guide at [stanprols.com/quick-ship-product-guide](http://stanprols.com/quick-ship-product-guide). Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

**WIREGUARD<sup>2</sup>**

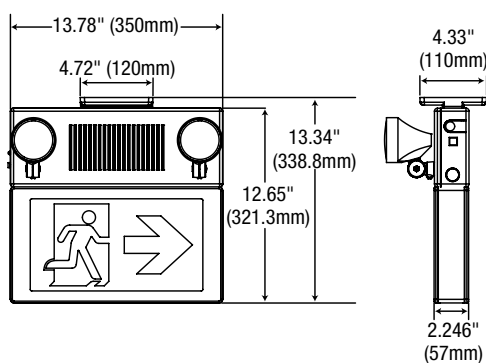
	Part number	Dimensions (in)
Wall mount	WGD510	17.25x17.25x7
Ceiling mount	WGD650	13.75x12.25x16.5

<sup>2</sup> Please contact your STANPRO customer service representative for more information.

**ACCESSORIES (order separately)**

Configuration	Single face	Double face
Up	FIBER-RMPS-UP	FIBERKIT-U-DF
Up Right	FIBER-RMPS-UR	FIBERKIT-UR-DF
Up Left	FIBER-RMPS-UL	FIBERKIT-UL-DF
Down	FIBER-RMPS-D	FIBERKIT-D-DF
Down Right	FIBER-RMPS-DR	FIBERKIT-DR-DF
Down Left	FIBER-RMPS-DL	FIBERKIT-DL-DF
No arrow	N/A	FIBER-RMPS

Note: For special directional legend lens, please order separately.

**DIMENSIONS**

**CONFIGURATION**


Comes standard with three pictogram legends for direction selection.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.