

RMS

STEEL

NBC2015 Compliant

The clean lines of the RMS series of commercial steel signs present a fully modern appearance. The steel provides for a rigid, durable and lightweight sign.
 Available in AC only, AC/DC and internally self-powered versions.

FEATURES AND SPECIFICATIONS

- **Circuitry - AC & AC/DC**
 - LED ultra bright light source
 - 120/277/347 VAC Input, field selectable
 - 1.9 W power consumption single or double face
 - Emergency DC wattages as follows:
6 VDC = 0.9 W, 12 VDC = 0.9 W, 24 VDC = 0.9 W
- **Circuitry - Self-powered**
 - LED ultra bright light source
 - 120/277/347 VAC Input, field selectable
 - 2.0 W power consumption single or double face
 - High-performance, Ni-Cad battery
 - 90 or 120 minutes emergency duration
 - Solid state transfer and battery charger
- **Mechanical**
 - Rigid housing steel construction
 - Universal faces
 - Universal mounting: ceiling mount, wall mount, end mount
 - White powder coat finish standard, other finishes and colors optional
- **Approvals**
 - CSA Certified to C22.2 #141-15, C860
- **Compliance**
 - Meets requirements of ICES-005



OVERVIEW

Light source	LED
Input voltage (VAC)	120/277/347
Input power	1.9 W AC & AC/DC (single or double face) 2W self-powered (single or double face)
DC voltage (VDC)	6, 12, 24
DC power (W)	0.9



**quick
ship**



**LED
fixture**



**ICES
005**




Energy Verified
Energie Vérifiée

QUICK SHIP AND TECHNICAL SPECIFICATION TABLE

Part number	DC Volts (VDC)	Nbr of faces	Light source	Input Volts (VAC)	Color
RMSOWH-IB	IB	Universal	LED	120/277/347	White
RMSOWH-UDC	UDC	Universal	LED	120/277/347	White

¹ QUICK SHIP: Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

ORDERING GUIDE

Series	Nbr of faces	Color	DC Volts (VDC)	Options
RMS	0 - Universal faces 1 - Single face 2 - Double face	WH - White (standard) BK - Black GY - Grey SP - Custom color (please specify)	NDC - AC only UDC - Universal DC backup voltage from 6 to 24 IB - Self-powered for 90 minutes IB1 - Self-powered for 120 minutes	AT¹ , WGD² , K5 , PGD , OP , B0 , W0 , CB5 , CB10 , TP 0 - No indicators (double face only)  D U UR DR DL UL Note: Indicators option available for single & double option only.

¹ AT available with IB and IB1, and available only for 120/347 VAC.

² Specify mounting.

QUICK SHIP: Not all products are Quick Ship. To view our Quick Ship qualified products, please consult our Quick Ship Product Guide at stanprols.com/quick-ship-product-guide.

Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

EMERGENCY LIGHTING OPTIONS


Option	Description
AT¹	Automatic test Self-diagnostic
WGD²	Wireguard (separate order)
K5	1/2" Knockout for pendant mount
PGD	Lexan Guard (separate order)
OP	Special Wordings
B0	Black Out Option
W0	White Out Option
CB5	Extension cable 5'
CB10	Extension cable 10'
TP	Tamper Proof Screws

WIREGUARD³

	Part number	Dimensions
Wall Mount	WGD520	14" x 10" x 4.75"
Ceiling Mount	WGD540	14.5" x 6.25" x 10.5"
End Mount	WGD650	13.75" x 12.25" x 16.5"

³ Please contact your STANPRO customer service representative for more information.

DIMENSIONS

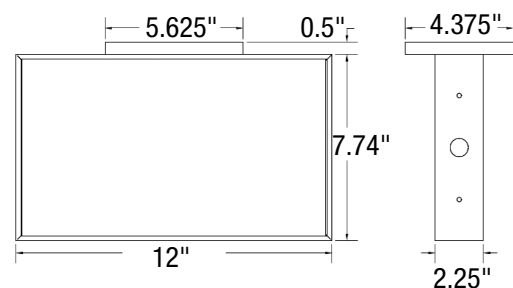

CONFIGURATIONS



Comes standard (single face) with three pictogram legends for direction selection.



Comes standard (double face) with two pictogram legends.



For double face no arrow options, select "No indicators" on the options column.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.