

## Series Spec Sheet

# RMPN

## PLASTIC RUNNING MAN

### LED 120/347 VAC Input

The RMPN series of commercial or decorative plastic running man signs is designed using durable and lightweight high impact thermoplastic.

### FEATURES AND SPECIFICATIONS

#### • Circuitry - AC & AC/DC

- LED ultra bright light source
- 120/347 VAC Input, field selectable
- 120 V/0.28 A/2.30 W;  
347 V/0.31 A/2.75 W max power consumption
- Emergency DC wattages as follows:  
6 VDC = 1.42 W,  
12 VDC = 1.42 W,  
24 VDC = 1.42 W.

#### • Circuitry - Self-Powered


- LED ultra bright light source
- 120/347 VAC Input, field selectable
- 120 V/0.46 A/4.01 W;  
347 V/0.37 A/3.51 W max power consumption
- Ambient temperature 10°C to 35°C
- High-performance, sealed Ni-Cad battery
- 90 Minutes emergency duration (standard)
- Solid state transfer and battery charger

#### • Mechanical

- High impact, UV stabilized, thermoplastic construction
- Quick snap faceplates and universal canopy for rapid and simple installation
- Flush wall mount backplate included

#### • Compliances

- CSA Certified to C22.2 #141.15, C860
- Meets requirements of ICES-005

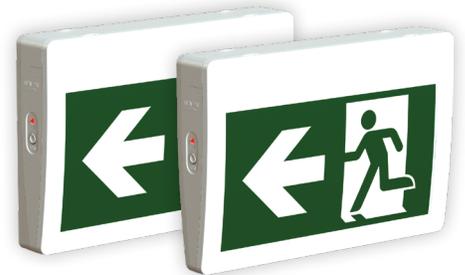

quick  
ship



LED  
fixture



ICES  
005



Energy Verified  
Énergie Vérifiée

**QUICK SHIP AND TECHNICAL SPECIFICATION TABLE** 🕒<sup>1</sup>

Part number	DC Volts (VDC)	Nbr of faces	Light source	Input Volts (VAC)	Color
RMPNOWH-IB	IB	Universal	LED	120/347	White
RMPNOWH-UDC	UDC	Universal	LED	120/347	White

<sup>1</sup> **QUICK SHIP:** Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

**ORDERING GUIDE**


<b>RMPN</b>	<b>0</b>			
Series	Nbr of faces and mounting	Color	DC Volts (VDC)	Options
RMPN	0 - Universal	WH - White	UDC - Universal DC backup voltage from 6 to 24 IB - Self-powered for 90 minutes	0 - No indicators (double face only)

**WIREGUARD**


	Part number	Dimensions (in)
Wall mount	WGD540	14.5 x 10.5 x 6.25
Ceiling mount	WGD590	15.25 x 6.75 x 14.25
End mount	WGD650	13.75 x 16.5 x 12.25

**DIMENSIONS**

**FLUSHED MOUNT**

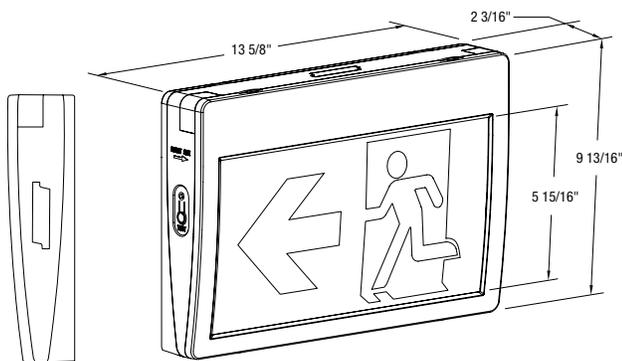

**TAPERED MOUNT**

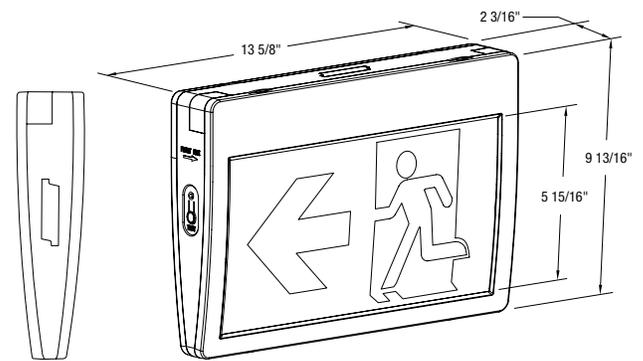

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

**CONFIGURATIONS**




Comes standard with three pictogram legends for direction selection.



For double face no arrow options, select "0" on the options column.

**ACCESSORIES**



Flush wall mount backplate. Use for direct wall mount (no canopy required) Spider knock-out for wall-mount



Universal canopy

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.