

# Technical Information Bulletin

## CHOICE LED Lamps



Date: \_\_\_\_\_ Name of distributor: \_\_\_\_\_  
In hands date of project: \_\_\_\_\_ Client #: \_\_\_\_\_  
Project name/Number: \_\_\_\_\_ Name of end user: \_\_\_\_\_

### ORDERING INFORMATION


Order code: 67964  
Description: A19/6W/27K/ND/CHOICE/STD  
UPC: 69549679641  
Case quantity: 1 / 100

### PERFORMANCE DATA

Shape: A19  
Wattage (W): 6  
Base: E26  
Lamp voltage (VAC): 120  
Colour temperature (K)\*\*: 2700  
Life L70 (hrs): 15 000  
Initial lumens (lm)\*: 480  
Initial lumens per watt (lm/W): 80  
CRI: 80  
Beam angle (°): 180  
Power factor: 0.70  
Operating temperature range: -30 °C / -22 °F to 40 °C / 104 °F

\*Initial lumens range: +/- 10 %

\*\*Typical colour temperature range: +/- 5 %

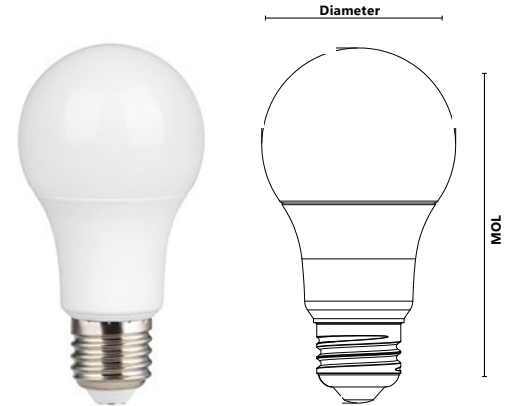

MOL : 4 1/4 in. (108 mm)

Dia. : 2 3/8 in. (60 mm)



### CAUTIONS

- Turn power off before inspection, installation, or removal.
- Not suitable for use in totally enclosed luminaires.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- NON-Dimmable
- Operating temperature: -20°C / -4°F to 40 °C / 104 °F.
- 2 Years Limited Warranty.

| Qty | Description | Price |
|-----|-------------|-------|
|     |             |       |

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_  
Company: \_\_\_\_\_  
Signature: \_\_\_\_\_

Date: \_\_\_\_\_

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.  
Data is based upon tests performed in a controlled environment and representative of relative performance.  
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

March 23, 2021