

Technical Information Bulletin

LED Lamps



Date: _____ Name of distributor: _____
In hands date of project: _____ Client #: _____
Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 67961
Description: LED/A21/S5/15W/30K/STD
UPC: 69549679610
Case quantity: 1 / 100

PERFORMANCE DATA

Shape: A21
Wattage (W): 15
Base: E26
Lamp voltage (VAC): 120
Colour temperature (K)**: 3 000
Life L70 (hrs): 25 000
Initial lumens (lm)*: 1 600
Initial lumens per watt (lm/W): 107
CRI: 80
Beam angle (°): 220
Power factor: 0.70
Operating temperature range: - 30 °C / - 22 °F to 40 °C / 104 °F


*Initial lumens range: +/- 10 %

**Typical colour temperature range: +/- 5 %



CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electrical shock – do not use where directly exposed to water or weather.
- Suitable for use in totally enclosed luminaires.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Compatible with most dimmers.
- For complete dimmer and warranty information visit www.standardpro.com.

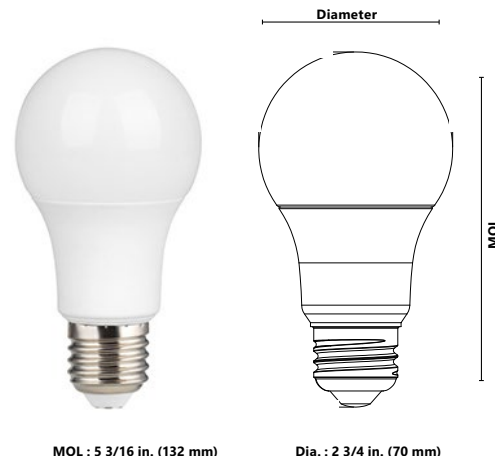

COMPATIBLE DIMMERS

Lutron	PD-5NE, PD-6WCL, DVCL-153P, CTCL-153P, AYCL-253P, SELV-300P, MACL-153P
Cooper	RRD-6NA, AAL06
Leviton	066EV, IPL06, 6674, DSL06-1ZL, IPE04-1LZ, DDMX1
Legrand	RH703PTUTC

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
Company: _____
Signature: _____

Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
Data is based upon tests performed in a controlled environment and representative of relative performance.
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.