

Project: \_\_\_\_\_ Type: \_\_\_\_\_  
 Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# L1RSH-L

## ROUND ECONOMIC AND HIGH PERFORMING LUMINAIRE

### ORDERING INFORMATION

**Order code:** 68605  
**Model number:** L1RSH-LS3A-H/50K  
**UPC:** 69549017733  
**Case quantity:** 1

### PHYSICAL DATA

**Dimensions:** 12" x 8.8" (305 mm x 223 mm)  
**Lens Type:** PC clear  
**Frame Material:** Black Aluminum  
**Mounting:** Hook + 10' cord

### PERFORMANCE DATA

**Watts (W):** 200  
**Volts (VAC):** 347<sup>4</sup>  
**Colour temperature (K)<sup>1</sup>:** 5 000  
**Lumen output (lm)<sup>2</sup>:** 27 000  
**Lumen per Watts (lm/W):** 135  
**CRI:** 80+  
**Life L70 (h)<sup>3</sup>:** >50 000  
**Life L90 (h)<sup>3</sup>:** >36 000  
**Beam angle (°):** 110  
**THD (%):** 7.7  
**Power factor:** 0.97  
**Dim Down Percentage (%):** 10  
**Frequency (Hz):** 50/60  
**Operating temp. range:** -40°C to 45°C (-40°F to 113°F)

<sup>1</sup> Typical colour temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

<sup>3</sup> Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

<sup>4</sup> Drivers operate from 277-480 V.



Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/search](http://www.designlights.org/search).

### COMPATIBLE ACCESSORIES

Order code	Type
68529	Aluminum reflector
68532	Clear PC reflector
68533	High frequency sensor
68536	Trunnion (± 90°)
68538	Safety cable


### COMPATIBLE DIMMERS

Brand	Model
LUTRON	DVSTV, DDTV
LEVITON	DS710
COOPER	SF10P
HUBBELL	LHD-IRS3-N-WH

NOTE: The above table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Standard recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation. Some dimmers may require more than one product for stable operation. The maximum number of products is determined by the dimmer wattage rating with LEDs. Be careful, these dimmers have different ratings depending on the product type. Again, refer to the dimmer installation instructions.

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.


## DIMENSIONS

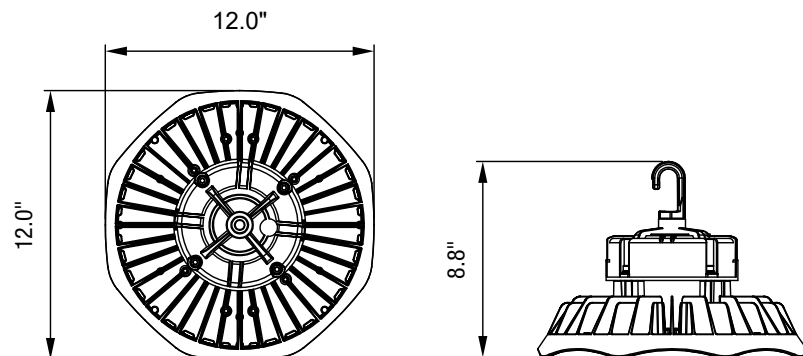

## PHOTOMETRIC DATA<sup>1</sup>

68605 • L1RSH-LS3A-H/50K • 27 729.6 lm

### Polar candela distribution

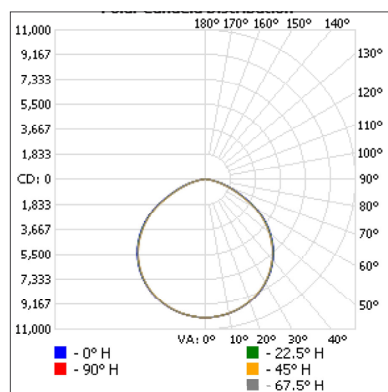

### Zonal lumen summary

Zone	Lumens	% Fixture
0-30	7 961.4	28.7%
0-40	13 123.3	47.3%
0-60	23 219.5	83.7%
60-90	4 510.2	16.3%
0-90	27 729.6	100%

### Illuminance at a distance

Center beam fc		Beam width	
4.3'	549 fc	13.1'	12.9'
8.7'	134 fc	26.4'	26.2'
13.0'	60.0 fc	39.5'	39.1'
17.3'	33.9 fc	52.5'	52.1'
21.7'	21.5 fc	65.9'	65.3'
26.0'	15.0 fc	79.0'	78.2'

■ Vert. spread: 113.3°  
■ Horiz. spread: 112.8°

<sup>1</sup> Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.