

Individual Spec Sheet

L2WMG

LED LINKABLE WRAPAROUND

ORDERING INFORMATION

Order code: 68137
Model number: L2WMG-48-1
UPC: 069549014640
Case quantity: 6

PHYSICAL DATA

Net weight (lbs): 4.63
Dimensions in. (cm): 48 (119.9)
Lens material: Frosted polycarbonate
Housing material: White powder coating steel
Mounting: Surface wall and ceiling mount

PERFORMANCE DATA

Watts (W): 47
Volts (VAC): 120-277
Color temperature (K)¹: 4 000
Lumen output (lm)²: 5 043
Efficiency (lm/W): 106
CRI: 84
Life L70 (h)³: 54 000
Tested LM-80 (h)³: 6000
Dimming: No
Power factor: 0.93
THD (%): 15
Frequency (Hz): 50/60
Surge protection (kV): 1
Input current (A): 0.8
Output current (mA): 1260
Operating temp. range: -20°C to 40°C (-4°F to 104°F)

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

COMPATIBLE ACCESSORIES

Order code	Model number
68858	Linkable Connector (No cable) ¹
68859	12" Linkable Cable Connector ¹
68860	48" Linkable Cable Connector
68861	72" Linkable Cable Connector
68862	96" Linkable Cable Connector
68863	48" Replacement Lens

¹ One piece is included in the box, extra units can be purchased separately.



Included Connectors



dimmmable
fixture

Dimming is not applicable
to continuous mounting



5 yrs
warranty



quick
ship



LED
fixture



damp
location




ICES
005



Intertek

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.


DIMENSIONS

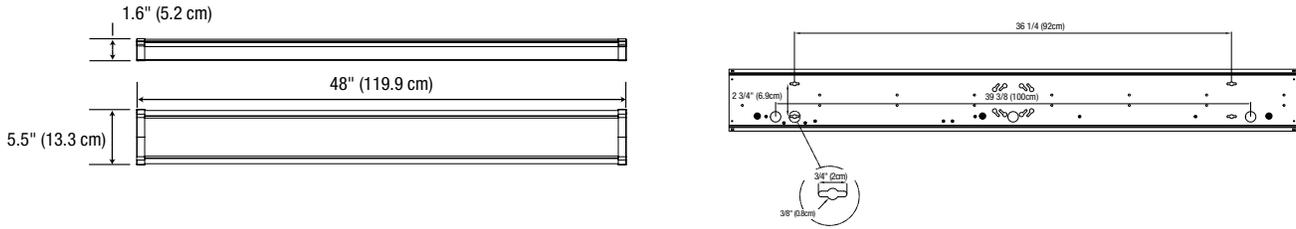

PHOTOMETRIC DATA¹

68137 • 4 946.4 lm

Polar candela distribution

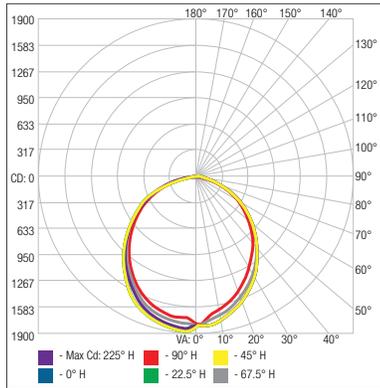

¹ Complete IES files available on our website.

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	1 366.9	27.6%
0-40	2 212.0	44.7%
0-60	3 834.6	77.5%
60-90	1 067.9	21.6%
70-100	513.6	10.4%
90-120	32.9	0.7%
0-90	4 902.5	99.1%
90-180	43.9	0.9%
0-180	4 946.4	100%

Illuminance at a distance

Center beam fc		Beam width	
1.7'	622	4.7'	4.0'
3.3'	165	9.2'	7.8'
5.0'	71.9	10.9'	11.0'
6.7'	40.0	18.6'	15.9'
8.3'	26.1	23.0'	19.6'
10.0'	18.0	27.8'	23.7'

■ Vert. spread: 108.5°
■ Horiz. spread: 99.6°

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.