

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

VTL4-L

3 CCT SELECT, NEMA4X, NSF VAPOR TIGHT

ORDERING INFORMATION

Order code: 68323
Model number: VTL4-LS4-Q/3C
UPC: 69549008144
Case quantity: 1
DLC unique ID: PLW4QC7U0LNS

PHYSICAL DATA

Dimensions: 45.66" x 4.74" (1160 mm x 120 mm)
Lens material: Frosted PC
Latch material: Stainless steel
Housing material: Polycarbonate
Mounting: Surface, suspended

PERFORMANCE DATA

Watts (W): 65
Volts (VAC): 347
Colour temperature (K)¹: 3 CCT (3 500/4 000/5 000)
Lumen output (lm)²: 8 560
Lumen per Watts (lm/W): 128
CRI: 80+
Life L70 (h)³: >50 000
THD (%): 9.37
Power factor: 0.9956
Dimming range: 0-10 V
Frequency (Hz): 50/60
Operating temp. range: -32°C to 40°C (-25°F to 104°F)

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations



5
 yrs
warranty

**quick
 ship**

**LED
 fixture**

**wet
 location**

**IP
 66**

IK10

**ICES
 005**

**3
 CCT TCC**
 3500 K / 4000 K / 5000 K

**DLC QPL
 LISTED
 PREMIUM**


**ETL
 LISTED
 US**

NSF

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/search.


This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

DIMENSIONS

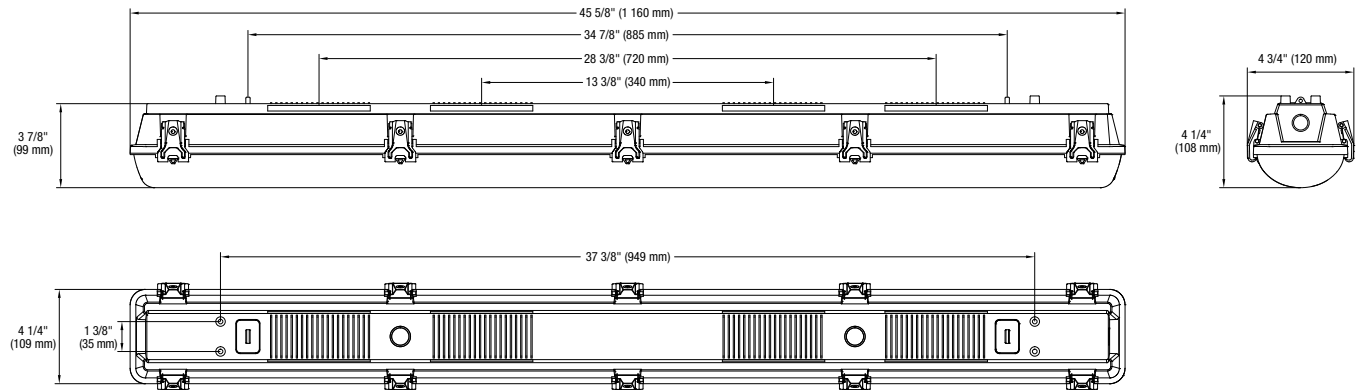PHOTOMETRIC DATA¹

68323 • VTL4-LS4-Q/3C • at 4 000 K • 9 260.3 lm

Polar candela distribution

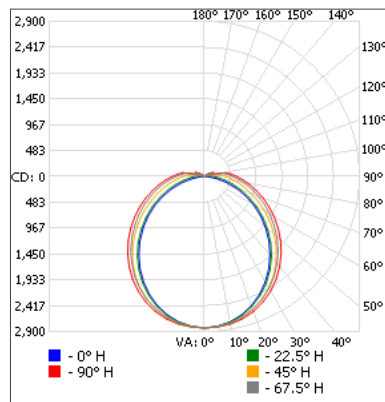

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	2 188.8	23.6%
0-40	3 577.5	38.6%
0-60	6 342.4	68.5%
60-90	2 378.9	25.7%
70-100	1 603.4	17.3%
90-120	477.1	5.2%
0-90	8 721.3	94.2%
90-180	539.0	5.8%
0-180	9 260.3	100%

Illuminance at a distance

Center beam fc		Beam width	
4.3'	153 fc	11.0'	16.6'
8.7'	37.4 fc	22.2'	33.6'
13.0'	16.8 fc	33.2'	50.2'
17.3'	9.46 fc	44.2'	66.8'
21.7'	6.01 fc	55.4'	83.7'
26.0'	4.19 fc	66.4'	100.3'

Vert. spread: 103.8°
Horiz. spread: 125.2°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.