

VT4

FLUORESCENT LIGHT FIXTURE

1 & 2 lamps

The VT4 series of IP65 rated linear fluorescent fixtures are sealed against water and moisture making them ideal for wet and damp locations. Uniform gasketing is inserted around the entire housing, ensuring a complete seal. The polycarbonate housing and lens are corrosion resistant and will not rot or rust. A high performance, metal reflector provides superior light output and helps dissipate ballast heat.

FEATURES AND SPECIFICATIONS

• Construction

Ballast

- T5 & T5HO: Our fixtures come standard with electronic program start ballasts.¹
- T8: Our fixtures come standard with electronic instant start ballasts (not intended for use with occupancy sensors).¹

Housing

- Lightweight, flexible, durable and sealed polycarbonate construction
- Integral gasket forms uniform, long-life seal around the entire enclosure
- Reinforced plastic lens latch clips
- UV stabilized, high clarity lens with prismatic cut-off
- Sealed strain relief/cable gland kit included

Self-Powered Emergency Back-Up (Optional)

- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration (standard)
- Automatic transfer and battery charger

Reflector

High efficiency, white metal reflector shaped for optimal light output

Mounting

- Row mount aligners molded into housing ends
- Stainless steel mounting hardware for wall, ceiling or suspended mounting

• Compliance

- Suitable for damp & wet locations
- IP65
- CSA Certified



High efficiency
Gull Wing Reflector



End view

OVERVIEW

Light source	Fluorescent
Watts (W)	28, 32, 54
Lamp type	T5, T5HO, T8



quick
ship



fluorescent
fixture



wet
location



¹ Dimming ballasts and other ballast types are optional.

QUICK SHIP AND TECHNICAL SPECIFICATION TABLE

Part number	Watts (W)	Volts (VAC)	Number of lamps	Lamp type
VT4F2T5H0054-W	54	120-277	2	T5H0
VT4F2T5H0054-H	54	347	2	T5H0
VT4F2T8032-A	32	120	2	T8
VT4F2T8032-W	32	120-277	2	T8
VT4F2T8032-H	32	347	2	T8

1 QUICK SHIP: Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

ORDERING GUIDE

Series	Number of lamps	Lamp type	Watts (W)	Operation	Volts (V)	Ballast type ⁴	Options
VT4	F1 - 1	T8	032 - 32	Blank - AC only (standard) DL ¹ - Dual AC and emergency	A - 120 E - 277 H - 347 W - 120-277	FRZ ² - Low ambient starting temperature (-29°C) PSP ³ - Program start parallel ballast LBF - Low ballast factor (T8 only) HBF - High ballast factor >1.0 (T8 only)	DIM1 ⁴ - Dimming ballast 0-10 V DC DIM2 ⁴ - Dimming ballast line voltage 120 V TAN - Tandem mount FU - Fuse FLN - Frosted lens L6 - 6' cable length L10 - 10' cable length SR - Specular reflector alanoïd 320 (not available for 1 lamp) SS - Stainless steel latches OS ⁵ - Occupancy sensor HT ⁶ - High ambient temperature 40°C. (T5H0) TP ⁷ - Vandal resistant screws
	F2 - 2	T5	028 - 28				
		T5H0 ¹	054 - 54				

¹ Available for 120 V, 120-277 V only.

² Not available with Program Start T8 ballasts.

³ Due to the fact that not all lamp/ballast combinations are compatible, please consult factory.

⁴ Available 120 V only

⁵ To see available options, please consult the occupancy sensors section.

⁶ VT4 fixtures used with T5H0 54W lamps rated for max. temperature: 25°C. For higher ambient temperatures (up to 40°C), please consult factory.


⁷ 1 tamper proof bit required per order (see accessories).

ACCESSORIES (order separately)

Part number	Type
HAR06-TPBIT-UDR	Tamper proof 2" Steel Power Bit

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

DIMENSIONS

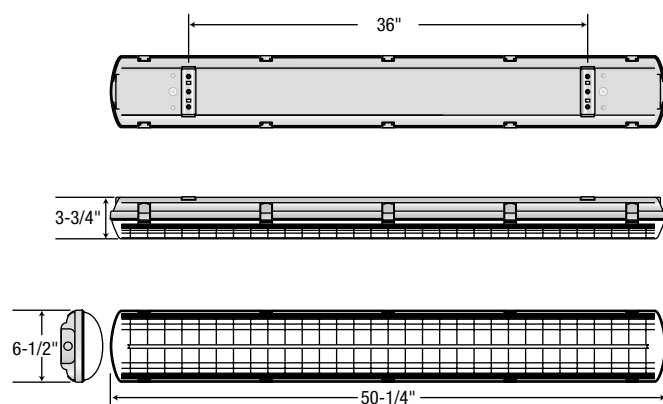

OCCUPANCY SENSORS

ON-OFF SENSORS

Detection - On at (Detection Area) % during (Hold Time) min. Off

Part number	Position	Voltage	Technology	Height	Detection Area	Hold time	Daylight min level	Remote ¹	Location ²
OSE-P0-0301	External	120-347V	PIR	20-40ft	100%	20min	NA		Dry, -10°C to +70°C
OSE-P0-0501	External	120-347V	PIR	15-40ft	100%	15min	3000 lux	OSI-FSIR-100	Dry, 0°C to +70°C
OSE-P0-0502	External	120-347V	PIR	15-40ft	100%	15min	3000 lux		Dry, 0°C to +70°C
OSE-P0-0701	External	120-277V	PIR	20ft	100%	15min	NA		Wet, -40°C to +70°C
OSE-P0-0801	External	347V	PIR	20ft	100%	15min	NA		Wet, -40°C to +70°C

¹ To be ordered separately

² Verify fixture temperature for compatibility with sensor

For more settings visit
stanprols.com/documentation/technical-information

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
 All products are subject to change or may be discontinued any time without notice.