

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

L2WMG

LED LINKABLE WRAPAROUND

ORDERING INFORMATION

Order code: 68136
Model number: L2WMG-24-1
UPC: 069549014633
Case quantity: 12

PHYSICAL DATA

Net weight (lbs): 2.65
Dimensions in. (cm): 24 (61)
Lens material: Frosted polycarbonate
Housing material: White powder coating steel
Mounting: Surface wall and ceiling mount

PERFORMANCE DATA

Watts (W): 27
Volts (VAC): 120-277
Color temperature (K):¹ 4 000
Lumen output (lm):² 2 878
Efficiency (lm/W): 106
CRI: 84
Life L70 (h):³ 54 000
Tested LM-80 (h):³ 9 000
Dimming: No
Power factor: 0.90
THD (%): 10
Frequency (Hz): 50/60
Surge protection (kV): 1
Input current (A): 0.29
Output current (mA): 480
Operating temp. range: -20°C to 40°C (-4°F to 104°F)

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

COMPATIBLE ACCESSORIES

Order code	Model number
68858	Linkable Connector (No cable) ¹
68859	12" Linkable Cable Connector ¹
68860	48" Linkable Cable Connector
68861	72" Linkable Cable Connector
68862	96" Linkable Cable Connector
68863	48" Replacement Lens

¹ One piece is included in the box, extra units can be purchased separately.



Included Connectors



**dimmmable
fixture**

Dimming is not applicable
to continuous mounting



**5 yrs
warranty**



**quick
ship**



**LED
fixture**



**damp
location**



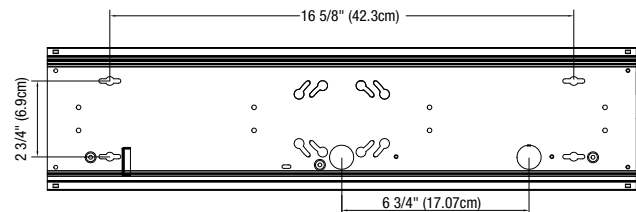
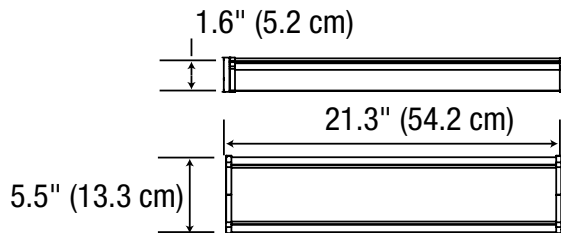
**ICES
005**



Intertek

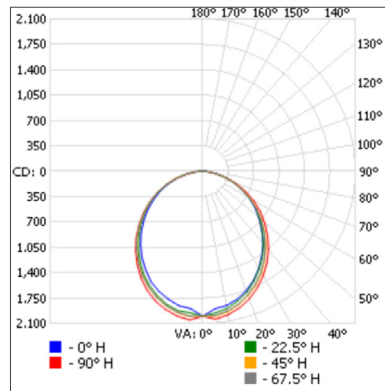
This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

DIMENSIONS

PHOTOMETRIC DATA¹

68136 • 2 858.5 lm

Polar candela distribution



Zonal lumen summary

Zone	Lumens	% Fixture
0-30	1 526.8	28.2%
0-40	20466.0	45.6%
0-60	4 256.4	78.6%
60-90	497.6	20.6%
70-100	258.7	9.2%
90-120	18.8	0.3%
0-90	5 380.0	99.4%
90-180	32.1	0.6%
0-180	5 412.0	100%

Illuminance at a distance

Center beam fc		Beam width	
2.0'	500.2	4.9'	5.4'
4.0'	125.1	9.7'	10.8'
6.0'	55.6	14.6'	16.2'
8.0'	31.3	19.4'	21.6'
10.0'	20.0	24.3'	26.9'

Vert. spread: 101.1°
 Horiz. spread: 106.8°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
 All products are subject to change or may be discontinued any time without notice.