




Exposed ZR6003AV Model

Sensor Operated Battery Powered Flush Valve

For 3/4" Urinals

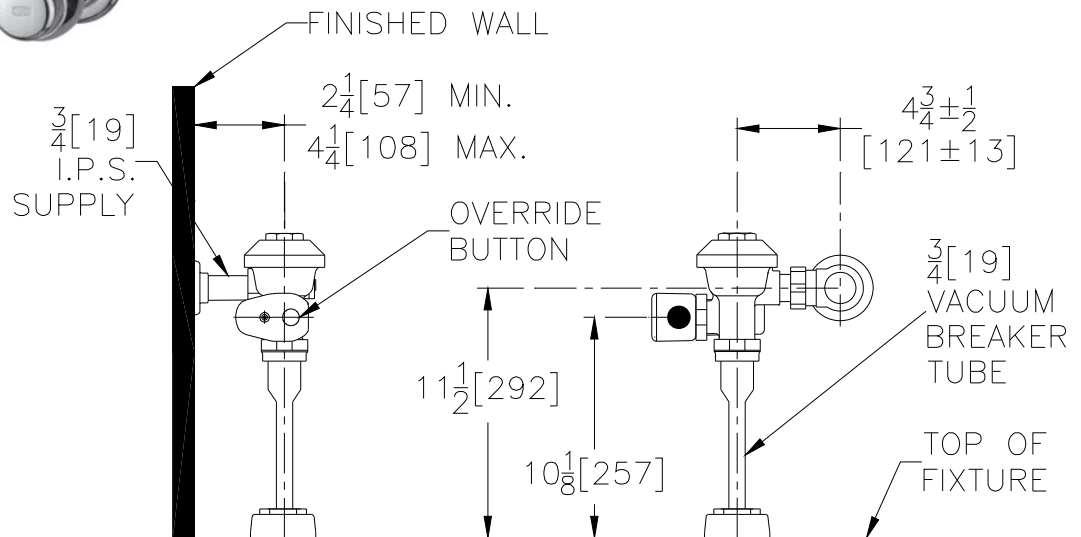

Flow Options

- ☐ -WS1 1.0 Gallons Low Consumption
- ☐ Standard Flush 1.5 Gallons Per Flush

Suffix Options (Check/Specify Appropriate Options)

- ☐ -YJ Split Ring Pipe Support
- ☐ -YK Solid Ring Pipe Support
- ☐ - Other

ENGINEERING SPECIFICATION: ZURN ZR6003AV AquaSense 'AV' Exposed 3/4[19] Urinal Flush Valve- Exposed, quiet diaphragm-type, chrome plated, flushometer valve with a polished exterior. Complete with Zurn's TPE chloramine resistant diaphragm with a clog resistant by-pass. The valve incorporates a 6VDC solenoid valve, a battery powered automatic sensor with manual override push button, a brass electronics housing with polished chrome plated exterior, high back pressure vacuum breaker, one piece hex coupling nut, adjustable tailpiece, spud coupling and flange for top spud connection. Control stop has internal siphon-guard protection, vandal resistant stop cap, sweat solder kit, and a cast wall flange with set screw. Internal seals are made of chloramine resistant materials.

This space is for Architectural/engineering Approval

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330

Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905-405-8272 Fax: 905-405-1292