

# 2295 SERIES

## NARROW STILE EXIT DEVICE



**Certifications**

- UL listed, Panic Exit
- 1 Year limited warranty

**Rail Assembly**

- High strength aluminum
- Field sizable

**Handing**

- Non-handed

**Door Width**

- 30–38" (762–965 mm)
- 36–44" (914–1118 mm) –option

**Door Thickness**

- 1 3/4" (45.5 mm)

*Recommended for aluminum doors*

**Stile Width**

- 1 3/4" (44.5 mm) minimum

*Measured from door edge*

**Projection**

- 2 1/16" (67 mm) from door surface

**Latchbolt**

- Stainless steel

**Strike**

- Steel, roller strike #2295S

**Dogging**

- Hex key dogging

**Hardware**

- Machine screws

**Trims**

- Escutcheon trim – available

*Sold separately, see 2295TE*

**Finish**

- 20D–Dark bronze; 28–Aluminum


*Other finishes available by special order*

2295PR	3	–	28
MODEL	SIZE		FINISH

# SELECTION GUIDE

MODEL		SIZE	DOOR WIDTH <sup>1</sup>	DOGGING	FINISH	/CASE
2295PR	Panic Exit Hardware Rim Device	3	30-38 (762-965)	■	20D, 28	4
		4	36-44 (914-1118)			

(1) RECOMMENDED DOOR WIDTH, IN (MM), FOR NON-STANDARD SIZES OR INSTALLATIONS PLEASE CONTACT.

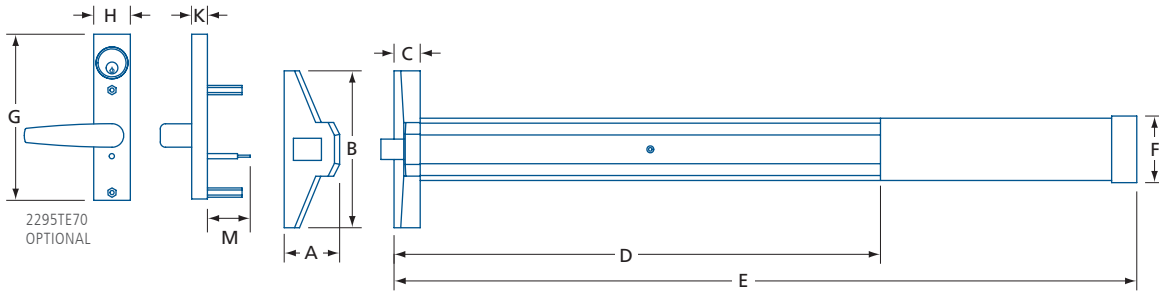

MODEL	A	B	C	D	E <sup>1</sup>	F	G	H	K	M
2295PR3	2 11/16 (67)	7 1/2 (191)	1 1/4 (32)	23 1/4 (591)	35 1/2 (902)	3 3/16 (81)	7 15/16 (201.6)	1 3/4 (44)	3/4 (19)	2 1/16 (52)
2295PR4					41 1/2 (1054)					

IN (MM)

(1) CAN BE CUT TO SIZE - SEE PRODUCT INSTALLATION INSTRUCTIONS

## 2295TE ESCUTCHEON TRIM



Trim	2295TE70
Function	Entrance/Classroom
Finish	20D-Dark bronze, 28-Aluminum
Lever	Straight, no return
Cylinder <sup>1</sup>	1 1/4 (32) mortise
Door Thickness	1 3/4 (44.5)
Warranty	1 Year limited

IN (MM) (1) SOLID BRASS, 6-PIN CYLINDER, SCHLAGE "C", 2 KEYS INCLUDED - KEYING SERVICES AVAILABLE

## PARTS & COMPONENTS



**2295S**  
Standard roller strike.



**2295AD**  
Dogging mechanism.

