

Technical Information Bulletin


CHOICE LED Lamps



Date: _____ Name of distributor: _____
In hands date of project: _____ Client #: _____
Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 68788
Description: MR16/S2/12V/6.5W/40K/35/CHOICE/STD
UPC: 069549019133
Case quantity: 24

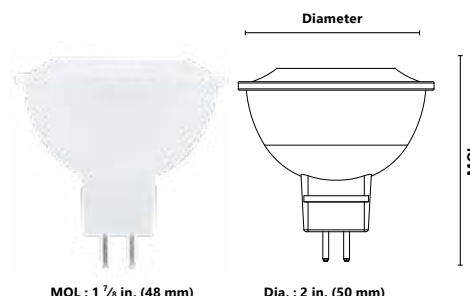

PERFORMANCE DATA

Shape: MR16
Base: GU5.3
Watts(W): 6.5
Volts (VAC): 12
Colour temperature (K)**: 4 000
Life L70 (hrs): 25 000
Initial lumens (lm)*: 563
Initial lumens per watt (lm/W): 87
CRI: 86
Beam angle (°): 35
CBCP: 778
Power factor: 0.92
Operating temperature range: -20 °C to 40 °C (-4 °F to 104 °F)
Traditional equivalent (W): 50

*Initial lumens range: +/- 10 %

**Typical colour temperature range: +/- 10 %



DIMMABLE



DAMP



NO MERCURY



3 YEARS WARRANTY



ICES 005



UL US



FCC

CAUTIONS

- Turn power off before inspection, installation, or removal.
- Not for use in totally enclosed luminaires.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Compatible with most dimmers.
- For complete dimmer and warranty information visit www.standardpro.com.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
Company: _____
Signature: _____

Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
Data is based upon tests performed in a controlled environment and representative of relative performance.
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

August 19, 2019