

dyson hepa big+quiet formaldehyde

User guide

SV12 JN.00000 PN.000000-00-00
00.00.00 VERSION NO.01



Contents

Getting started

Assembling your machine

Positioning your machine

Using your machine

CO₂ monitoring

Changing your HEPA filter

Changing your carbon filter

Looking after your machine

Getting started


Real-time LCD screen
LCD screen reports indoor
air quality in real time.

Power button
Press to turn on or off.

CO₂ sensor
Senses and reports CO₂ levels
and notifies when they exceed
recommended volumes.




360° HEPA H13 filter

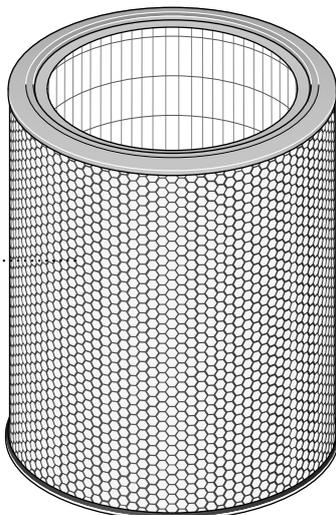

**Selective catalytic
oxidisation filter**

Carbon filter

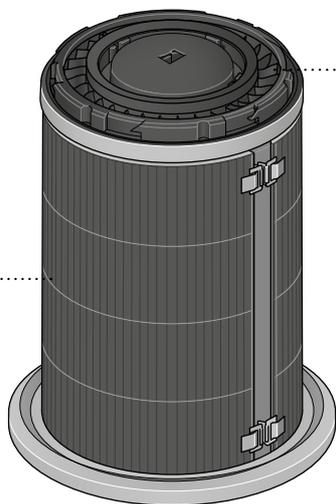

Hidden wheels
Easy to manoeuvre across
a room – designed for
hard surfaces.

Assembling your machine

Use both hands to lift your machine out of the box, by its base.

Your machine comes with a HEPA filter, carbon filter and permanent catalytic filter. These are already installed in your machine.

Lift the conic amplifier out of the box and place it on the top of your machine.

Rotate the conic amplifier until it clicks securely into place.

Plug in and press the power button.





Positioning your machine

Your machine is fitted with wheels to make it easier to move.

Position your machine on a level floor.

For the most effective purification, position your machine on the edge of the room at least 1 metre from the wall, with the conic amplifier pointing to the furthest point, along the wall.

You can also position your machine facing diagonally across the room.

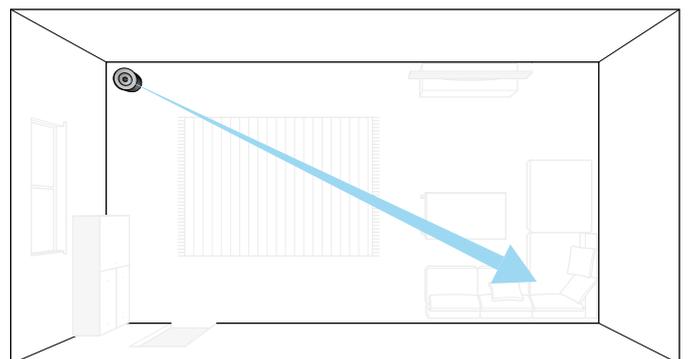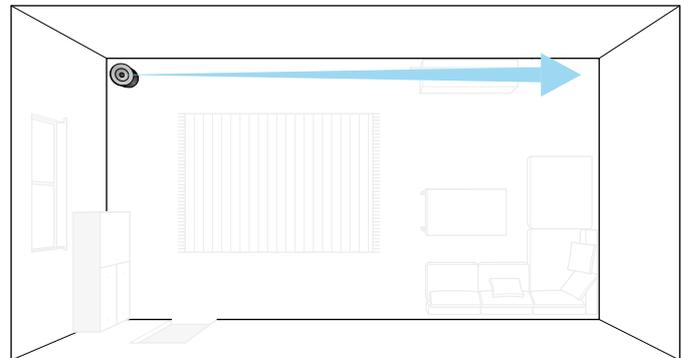

Using your machine

Power and Airflow speed

Press the Power button on the screen to switch on your machine.

Press the Power button again for Airflow speed 1.


Press the Power button a second time for Airflow speed 2.

Press and hold the Power button to switch off your machine.




CO₂ monitoring


The LCD screen displays the power mode setting and the CO₂ level in the room – reporting it in real time.

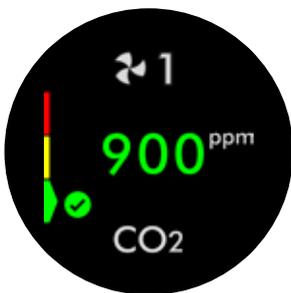

Low CO₂
CO₂ is at a safe level.

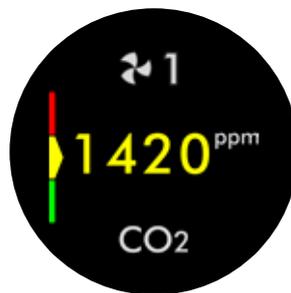

Medium CO₂
CO₂ has built up. It's advisable to take action, like opening a door or window.

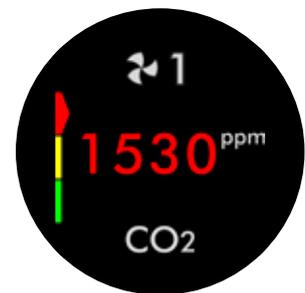


High CO₂
CO₂ has built up to a level of concern. It's advisable to take action, like opening a door or window.

Changing your HEPA filter

Remove the conic amplifier

Slide the Release button on the back of the conic amplifier to unlock. Lift the conic amplifier off your machine.


Lift the outer cover off the base of your machine.

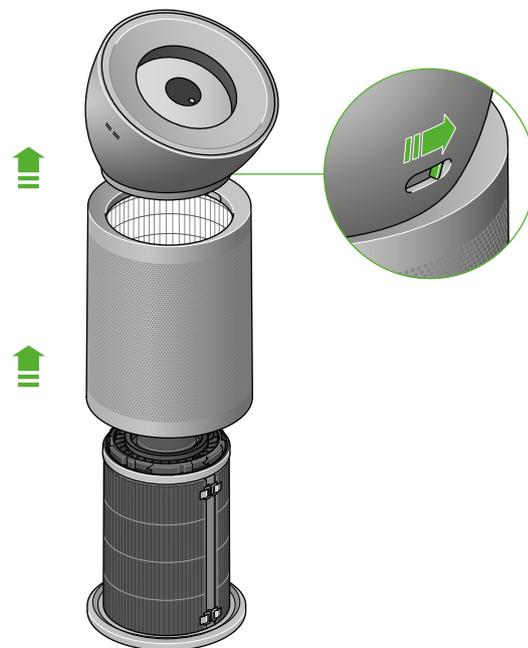

Remove the filter

The HEPA filter is located in the outer cover. Press the filter release buttons located on the inner rim and lift the outer cover off the filter.

Dispose of the filter.

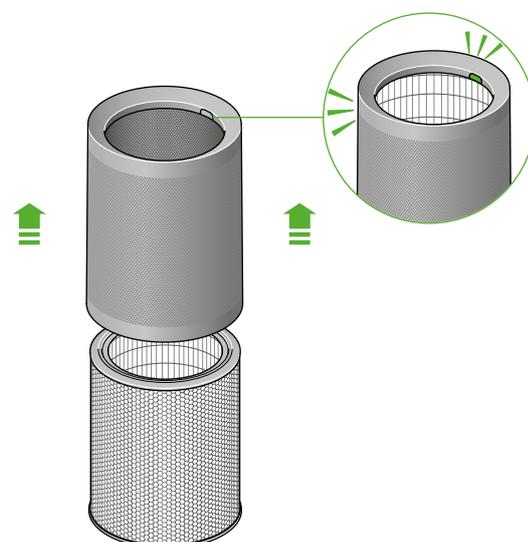


Install a new filter

Remove your replacement filter from any packaging. Place the filter on the base of your machine.

Place the outer cover over the filter and press down until it clicks securely into position.

Place the conic amplifier on your machine and rotate until it clicks securely in position.

Plug in and press the power button.

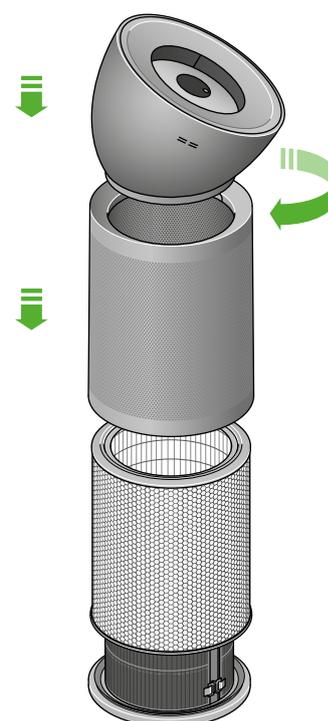


Changing your carbon filter

Remove the conic amplifier

Slide the Release button on the back of the conic amplifier to unlock. Lift the conic amplifier off your machine.


Lift the outer cover off the base of your machine.

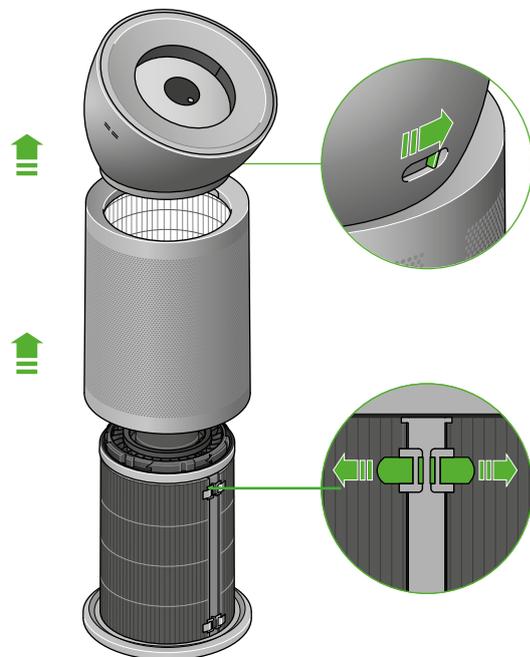

Remove the filter

The carbon filter is wrapped around the central body of your machine. Pull each of the four clips towards you to release the filter.

Dispose of the filter.

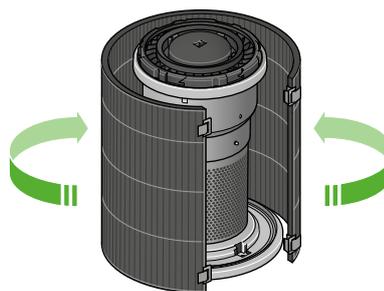

Install a new filter


Remove your replacement filter from any packaging. Place the filter on the base of your machine.

Wrap the filter around the central body of your machine, fit the clips into position and push each one to secure the filter.

Place the outer cover back in position on the base of your machine.

Place the conic amplifier on your machine and twist until it clicks securely in position.

Plug in and press the power button.

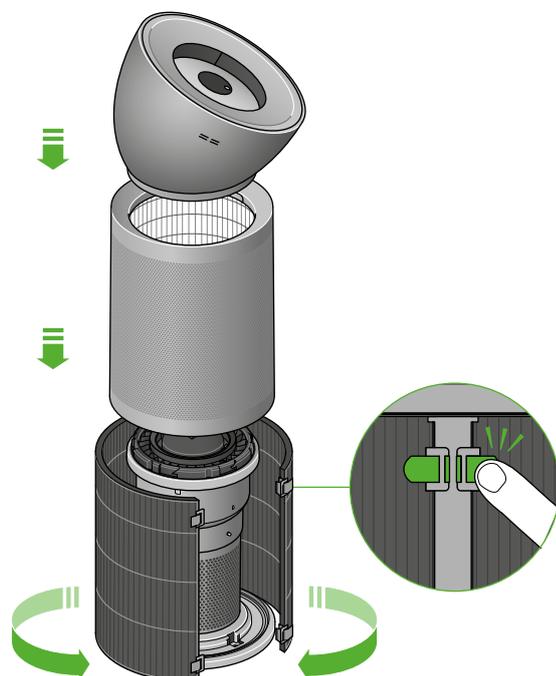


Looking after your machine

To always get the best performance from your Dyson air purifier, it's important to regularly clean it and check for blockages.

Cleaning your machine

If your machine is dusty, wipe with a damp, lint-free cloth.

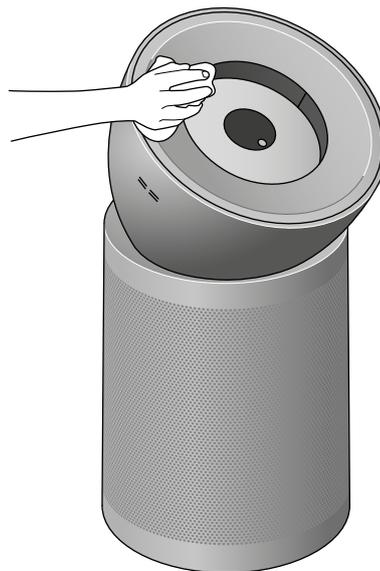

Check the sensor inlets on the left hand side of the conic amplifier for dust and debris.

Look for dust and debris in the outer cover and in the conic amplifier.

Use a soft brush to remove dust and debris.

Don't use detergents or polishes to clean your machine.

