

Series Spec Sheet

PRMPN-2N

PLASTIC COMBO RUNNING MAN STANDALONE LED 120-347 VAC Input

The PRMPN-2N commercial plastic combination running man sign is designed using durable and lightweight high impact thermoplastic. Combination sign with a canopy quick snap for a decorative look or a flush mount for rigid installation.

FEATURES AND SPECIFICATIONS

• Circuitry

- LED ultra bright light source
- 120-347 VAC Input, field selectable
- 120-347 V/0.32 A/4.5 W max power consumption
- Dry or damp location
- Ambient temperature 10°C to 35°C
- 120 minutes emergency power duration standard
- Two 2 W LED heads
- Push button test switch
- Diagnostic/pilot LED for AC ON
- Fully automatic, current limited charger
- Solid state design and construction with brownout and short circuit protection
- Temperature compensated
- Maintenance free, Ni-Cad battery

• Mechanical

- High impact, UV stabilized, thermoplastic construction
- Quick snap faceplates and universal canopy for rapid and simple installation
- Universal faces
- Universal mounting
- White colour is standard
- Fully adjustable, high impact thermoplastic round LED heads are standard

• Compliances

- CSA Certified to C22.2 #141-15, C860
- Meets requirements of ICES-005



quick
ship



ICES
005



Energy Verified
Énergie Vérifiée

For complete warranty details, please see our terms and conditions on our website.

QUICK SHIP AND TECHNICAL SPECIFICATION TABLE 

Part number	DC Volts (VDC)	Watts (W)	Nbr of faces	Nbr of heads	Head	Lamp (W)	Light source	Input Volts (VAC)	Color
PRMPN-2N	N/A	N/A	Universal	2	N/A	2	DEL	120-347	White


1 QUICK SHIP: Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

ACCESSORIES (order separately)

Part number	Type
FIBER-RMPN-CG	Running man fiber no arrow

ACCESSORIES

Flush wall mount backplate. Use for direct wall mount (no canopy required)
Spider knock-out for wall-mount




Universal canopy




DIMENSIONS

FLUSH MOUNT

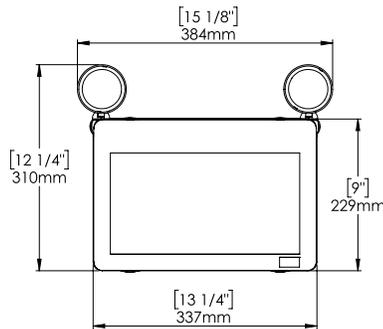

TAPERED MOUNT

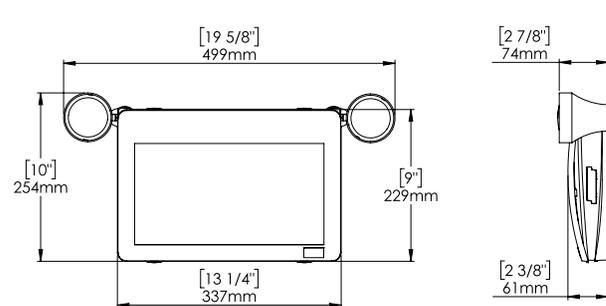

CONFIGURATIONS



Comes standard with three pictogram legends for direction selection.



For double face no arrow options, please order the RMPN along with the following fiber: FIBER-RMPN-CG

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.