

Project: \_\_\_\_\_ Type: \_\_\_\_\_  
 Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# A19

## CHOICE LED LAMPS

### ORDERING INFORMATION

**Order code:** 69718  
**Model number:** A19/S4/8W/30K/ND/CHOICE/STD 4P  
**UPC:** 069549029392  
**Case quantity:** 12 x 4 pack

### PHYSICAL DATA

**Base:** E26  
**Type:** A19 4 pack

### PERFORMANCE DATA


**Watts (W):** 8  
**Traditional equivalent (W):** 60  
**Volts (V AC):** 120  
**Color temperature (K)<sup>1</sup>:** 3 000  
**Lumen output (lm)<sup>2</sup>:** 800  
**Efficacy (lm/W):** 100  
**CRI:** 80  
**Dimmable:** No  
**Life L70 (h)<sup>3</sup>:** 25 000  
**Beam Angle:** 220  
**Power factor:** ≥0.5  
**Frequency (Hz):** 60  
**Input current (A):** 120  
**Operating temp. range:** - 30 °C / - 22 °F to 35 °C / 95 °F  
**Energy Star:** Yes  
**Warranty:** 3 Years

<sup>1</sup> Typical color temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

<sup>3</sup> Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

### DIMENSIONS

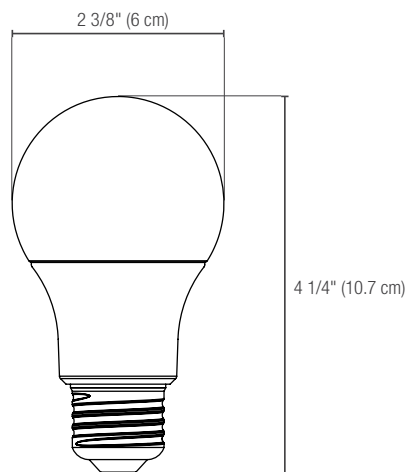

**3**  
yrs  
warranty



non  
dimmable

6

damp  
location



ICES  
005



enclosed  
fixture



This lighting equipment meets requirements of ICES-005 issue 5 - class B for use in residential applications.  
 Data is based upon tests performed in a controlled environment.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.