

06-88315 / 06-8831SSN KITCHEN FAUCET





PVD SATIN NICKEL




## **FEATURES**


- SINGLE LEVER HANDLE WITH PULL-OUT SPRAY AND DETACHABLE ESCUTCHEON
- AVAILABLE IN POLISHED CHROME AND PVD SATIN NICKEL
- FITS STANDARD 8" THREE HOLE SINK
- CERAMIC CARTRIDGE
- MAXIMUM FLOW RATE: 2.2 GPM/8.3 LPM @ 60 PSI
- SOLID BRASS & COPPER WATERWAYS
- FACTORY PRESSURE TESTED
- cUPC CERTIFIED
- LOW LEAD COMPLIANT



# **INFINITY**

# 06-8831S / 06-8831SSN KITCHEN FAUCET

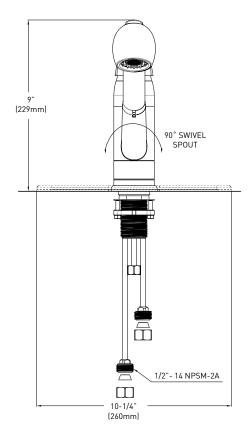

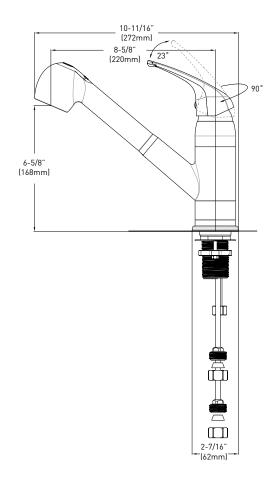

CRITICAL DIMENSIONS NOT TO SCALE

## CONSTRUCTION

- METAL CONSTRUCTION WITH VARIOUS FINISHES IDENTIFIED BY SUFFIX
- BRASS VALVE BODY

## MOUNTING

- DESIGNED TO INSTALL THROUGH 1 HOLE, 1-5/8" (42mm) MIN. DIA. ON DECKS UP TO 1-3/4" (45mm)
- OPTIONAL ESCUTCHEON INCLUDED TO INSTALL THROUGH 3 HOLES WITH 8" (203mm) CENTERS, ON DECKS UP TO 1-7/8" (47mm)

### INLET

- 1/4" O.D. COPPER SUPPLY TUBES WITH 1/2"-14 NPSM ADAPTERS OPERATION
- PIVOT ACTION LEVER STYLE HANDLE
- OPERATES WITH LESS THAN 5 LBS. OF FORCE

# WATER-CONTROL MECHANISM

- CARTRIDGE
- ONE-PIECE, SELF-CONTAINED CERAMIC DISC VALVE

#### FIOW

AERATOR LIMITS MAXIMUM FLOW RATE TO 2.2 GPM MAX. [8.3 L/MIN.]
© 60 PSI

#### CODES/STANDARDS APPLICABLE

- ASME A112.18.1
- ANSI/NSF 61/9
- cUPC CERTIFIED
- LOW LEAD COMPLIANT

#### GUARANTEE

- LIMITED LIFETIME GUARANTEE AGAINST DEFECTS IN MATERIAL AND WORKMANSHIP TO ORIGINAL CONSUMER PURCHASER
- 5 YEAR WARRANTY IF USED IN INDUSTRIAL, COMMERCIAL AND BUSINESS INSTALLATIONS





