



Date:

**2/21/2004**

## **Sink Faucet Wallmount**

Rough Chrome Wallmount Faucet-Rigid Spout

**Model No: 28T8073**


### **COMPLIES WITH:**

- CSA certified.
- Complies to ANSI/ASME Standard A112.18.1M.
- Lever Blade Handle No. 3, ADA compliant and meets Handicapped Accessibility Standard ANSI 117.1 of less than 5 lbs operating force.
- VACUUM BREAKERS: (OUTLETS)
- No. 6 Certified under ASSE Standard 1011 and CSA Standard B64.2
- No. 8 Certified under ASSE Standard 1001 and CSA Standard B64.1.1
- IAPMO listed
- (Contact Delta Representative for State and/or Local Approvals.)

### **SPECIFICATION:**

- 203 mm (8") centers cast brass wallmount sink faucet
- two handle
- centers adjustable from 7.75" to 8.25" unless AC option selected
- with integral check stops
- rough chrome plated finish
- Tuf-Teck compression structures
- 90% flow with first 1/4 turn of operation
- positive shutoff even in poor water conditions
- Spout: 0 - Short Rigid Spout with Pail Hook, No Brace
- Outlet#: 7 - Spout End Vac Breaker w/Hose-1219 mm (48") Hose and S/S Hanger
- Handle#: 3 - VR 70 mm (2-3/4") Lever Blade Handles-ADA Compliant-Metal-Color indexed-Vandal Resistant(VR) screws

***(Dimensional drawing on following page)***

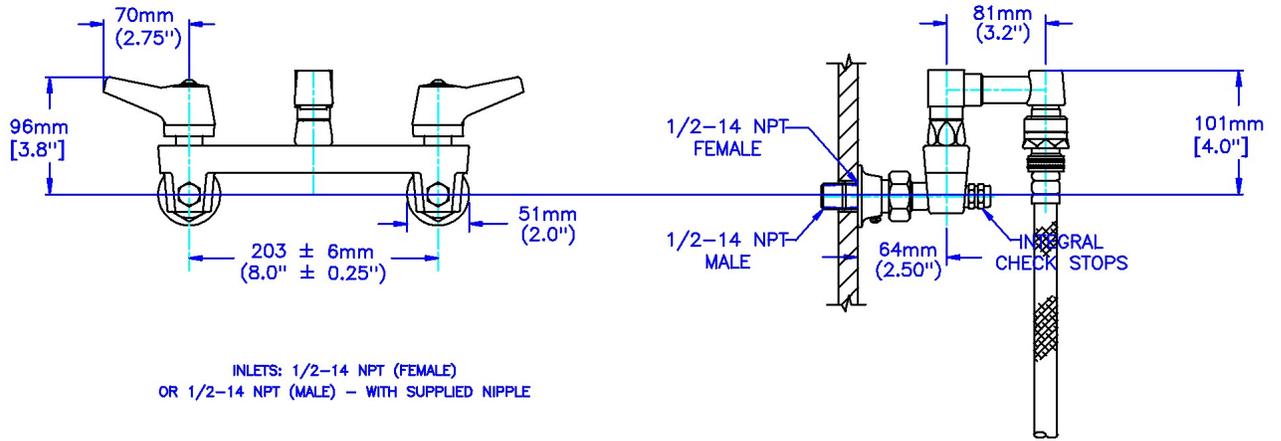

INLETS: 1/2-14 NPT (FEMALE)  
OR 1/2-14 NPT (MALE) - WITH SUPPLIED NIPPLE

