

Cast Deckmount Sink Faucets 8" Centers

TECK®
COMMERCIAL



Specification: (example)

- **HEAVY DUTY CAST BRASS** sink faucet
- 203mm (8") center two handle
- Polished chrome plated finish
- **BRASS** swing spout or
3/8" IPS **BRASS PIPE** Rigid/Swivel Gooseneck Spout
- Metal hold-down package
- Color indexed metal handles with vandal resistant screws
- **TUF-TECK®** compression structures
- and ... with ... (add spout required)
- with ... (add outlet required)
- with ... (add handle required)
- with ... (add suffix **-LS** if required – See Back Page)
- with ... (add suffix **-TI** if required – See Back Page)

26T3944



26T3133

Engineer/Architect Approval














Model Specified:

Approval:

Date:

DESCRIPTION	PRODUCT NO.
CAST Deckmount	26T3



SPOUT	OUTLET	HANDLE
0 <input type="checkbox"/>	0 <input type="checkbox"/>	0 <input type="checkbox"/>
1 203mm (8") Wallform (S2) Swing Spout (2) <input type="checkbox"/> 	1 <input type="checkbox"/>	1 Five Flute Handles <input type="checkbox"/> 
2 203mm (8") Tubular (S5) Swing Spout (2) <input type="checkbox"/> 	2 Vandal Resistant 1.5 USGPM (5.7 L/min.) Laminar w/Antimicrobial By Agion® <input type="checkbox"/> 	2 102mm (4") Hooded Blade Handles (5) <input type="checkbox"/> 
3 <input type="checkbox"/>	3 Vandal Resistant 1.5 USGPM (5.7 L/min.) Flow Control Aerator <input type="checkbox"/> 	3 76mm (3") Lever Blade Handles (5) <input type="checkbox"/> 
4 <input type="checkbox"/>	4 Standard 1.5 USGPM (5.7 L/min.) Flow Control Aerator <input type="checkbox"/> 	4 102mm (4") Blade Handles, Sanitary Hoods (5) <input type="checkbox"/> 
5 <input type="checkbox"/>	5 Vandal Resistant Non-Aerating Spray Outlet 0.5 USGPM (1.9 L/min.) <input type="checkbox"/> 	5 152mm (6") Wrist Handles, Sanitary Hoods <input type="checkbox"/> 
6 <input type="checkbox"/>	6 <input type="checkbox"/>	6 <input type="checkbox"/>
7 <input type="checkbox"/>	7 Smooth End, Laminar Flow Control in Base of Gooseneck Spout 1.1 USGPM (4.2 L/min.) (3) <input type="checkbox"/> 	7 <input type="checkbox"/>
8 <input type="checkbox"/>	8 <input type="checkbox"/>	8 <input type="checkbox"/>
9 Heavy Duty 152mm (6") Bend Rigid/Swivel (R4) Gooseneck Spout (1) (4) <input type="checkbox"/> 	9 <input type="checkbox"/>	9 <input type="checkbox"/>

(1) Available **Optional Rigid/Swivel Spouts**. These spouts can ONLY be added to **SPOUT Option No. 9**. Note: Use this page front and back as a product submittal sheet. Flow Rates are at 60 PSI.
 (2) Available **Optional Swing Spouts**. These spouts can ONLY be added to **SPOUT Option No. 2**. Refer to www.specselect.com for individual models.
 (3) This outlet can ONLY be added to **SPOUT Option No. 9**. (4) 120° Limited Swing Spout available. Add Suffix **-LS**. (5) H/C Temperature Indicator Available. Add Suffix **-TI**.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-26T Rev. A

Approvals:


- CSA certified
 - Complies to ASME A112.18.1
 - Lever Blade Handles No. 2, 3, 4, and 5, ADA Compliant and meet Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force.
- (Contact Delta Representative for State and/or Local Approvals.)

HANDLE TEMPERATURE INDICATORS

- ☐ Add suffix **"-TI"** to Product Number for handle temperature indicators "H" (red), "C" (blue).
Available on handle options 2, 3 or 4 only.



FLOW RATE vs PRESSURE

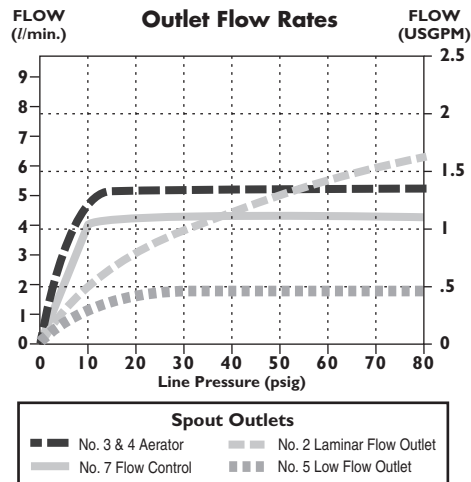

FOR OPTIONAL RIGID/SWIVEL & LIMITED SWING SPOUTS

See **DSP-R/S** for detailed specification
(Found in the "Add-On Option" section when using the printed spec binder)


FOR OPTIONAL SWING SPOUTS

See **DSP-S/S** for detailed specification
(Found in the "Add-On Option" section when using the printed spec binder)

INLETS - 1/2" MIP/Coupling Nuts

Note: Measurements may vary
± 6mm (0.25")



FRONT VIEW

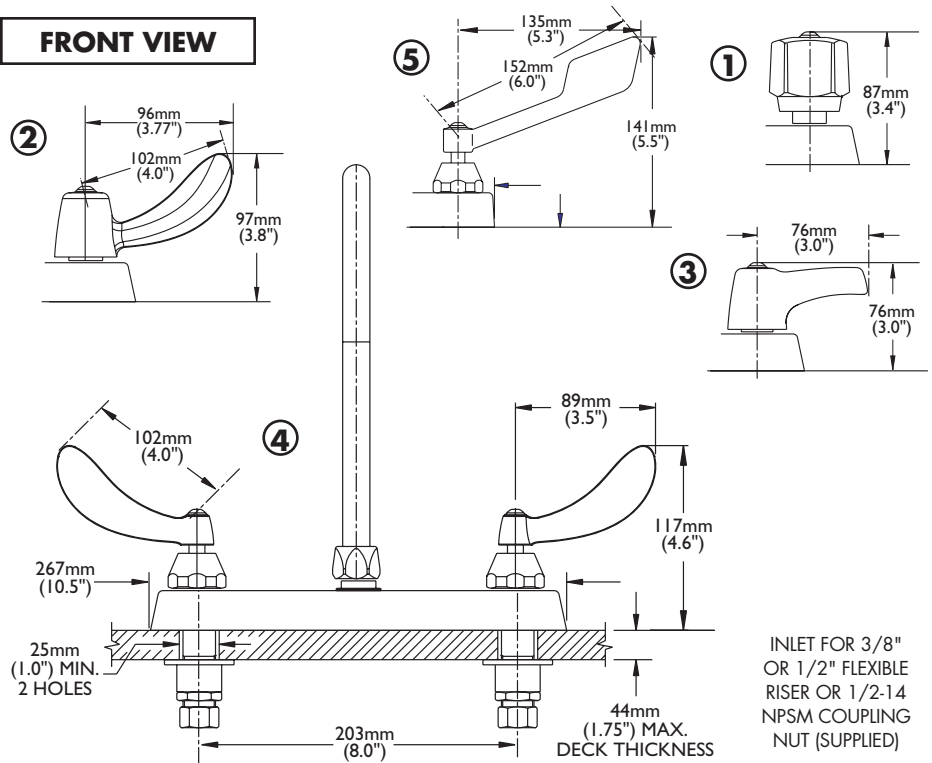


GOOSENECK SPOUT

Outlets #2, 3, 4 & 5

Outlet #7

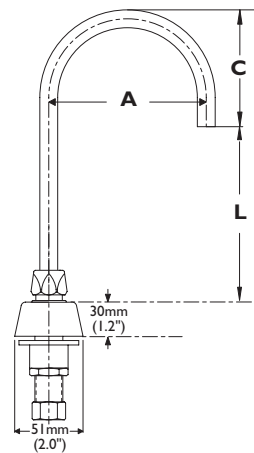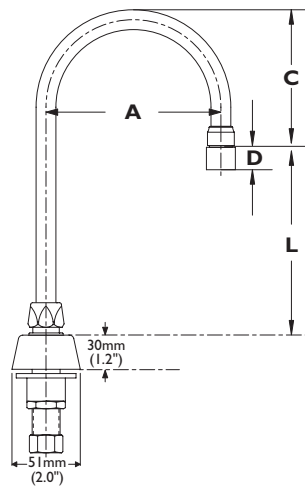

SWING SPOUT

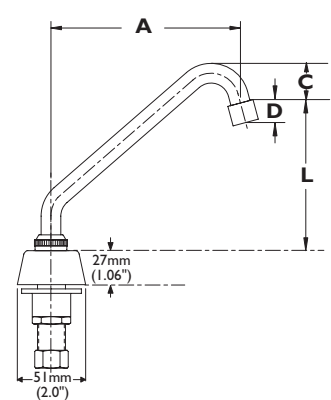

LIMITED SWING GOOSENECK

- ☐ Add suffix **"-LS"** to Product Number for 120° Limited Swing

OUTLET NO.	"D"	
	mm	in.
2	18	0.69
3	18	0.69
4	17	0.67
5	18	0.69

GOOSENECK SPOUT ASSEMBLY #9

SPOUT/OUTLET	"A"		"C"		"L"	
	mm	in.	mm	in.	mm	in.
Gooseneck-Standard (R4) for outlets #2, 3, 4 & 5	152	6	124	4.9	146	5.8
Gooseneck-Standard (R4) for outlet #7	152	6	117	4.6	152	6.0

SWING SPOUT ASSEMBLIES

SPOUT NO.	SPOUT TYPE	"A"		"C"		"L"	
		mm	in.	mm	in.	mm	in.
1	8" Wallform Spout (S2)	206	8.1	15	0.6	130	5.1
2	8" Tubular Spout (S5)	185	7.3	41	1.6	147	5.8