





SharkBite® Water Heater Installation Kit

The SharkBite® Water Heater Installation Kit is designed to simplify water heater installation. The kit features special push-fit fittings that allow the user to connect water distribution pipe in seconds with relative ease.

- Instant push-fit connection for increased ease-of-use:
No soldering, clamps, unions, or glue required.
- Fittings certified to 200 PSI and 200°F (93°C):
Proven durability and quality.
- Fits copper tubing, and CTS CPVC and PEX:
Connects all three types in any combination.
- Integral tube liner for PEX installations: *Integrated design means no loose components, ensures secure, reliable connection.*
- Design certified and agency listed: *Inspector friendly, peace of mind!*
- Compact, robust DZR brass body: *Foundation of a strong, corrosion resistant, durable fitting.*
- Design certified to ANSI/NSF-61 and ASSE 1061 product standard for use in potable water and hydronic heating water distribution: *Quality engineered and manufactured.*
- Approved to be used underground and behind walls without access panels.
- Designed for hydronic heating as well as potable water distribution.

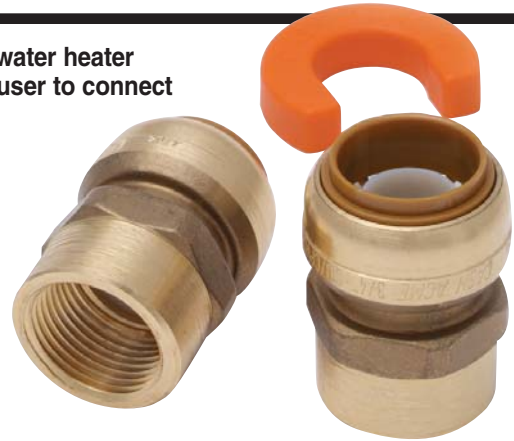


TYPICAL INSTALLATION

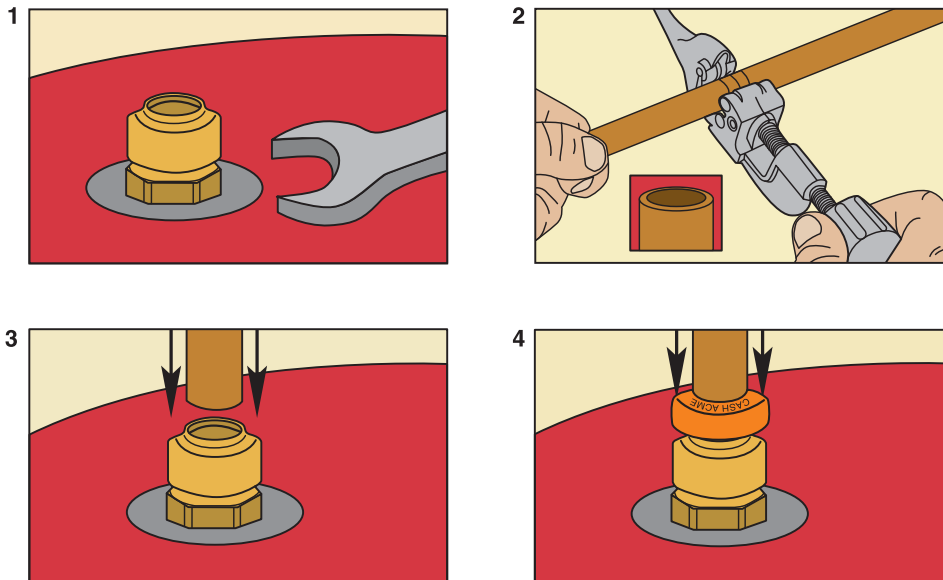

(Please consult with local plumbing codes concerning specific water heater piping requirements.)



SharkBite® Water Heater Installation Kit

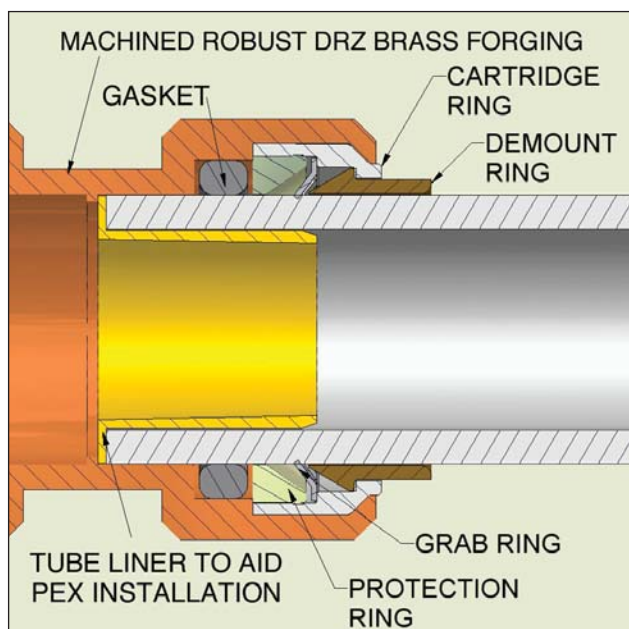

SIZES

Kit	A	B	C
1/2" X 1/2" MNPT (U068)	1/2"	1.75"	3/4" FNPT
3/4" X 3/4" FNPT (U088)	3/4"	1.79"	3/4" FNPT

CERTIFICATIONS

The **SharkBite® push-fit fittings** have been design certified and listed to **ASSE 1061/ NSF 61**. The **SharkBite® push-fit fittings** are listed by **IAPMO** and are certified for potable and hydronic heating water distribution (note: Glycol mixture for hydronics is not to exceed 50% concentration). The **SharkBite® push-fit fittings** have been certified for underground applications and as a manufactured joint without access panels and they meet **UPC, IPC** and **cUPC** requirements.