

# 5.5" Direct Drive Motors


## 5.5" Flex Mount Direct Drive Motors

### Features

- 48Y Frame
- 5.5" Diameter
- Open Enclosure
- Mounting: Flex
- 60 Hz
- Sleeve & Ball Bearing
- Shaft: 1/2" x 6"
- Reversible
- Permanent Split Capacitor (P.S.C.)
- 60" Coloured Electrical Leads
- 45°C (113°F) Ambient
- Insulation Class B
- Thermally Protected

**9" & 10"  
Bolt  
Circle**

**24 Month  
Warranty**

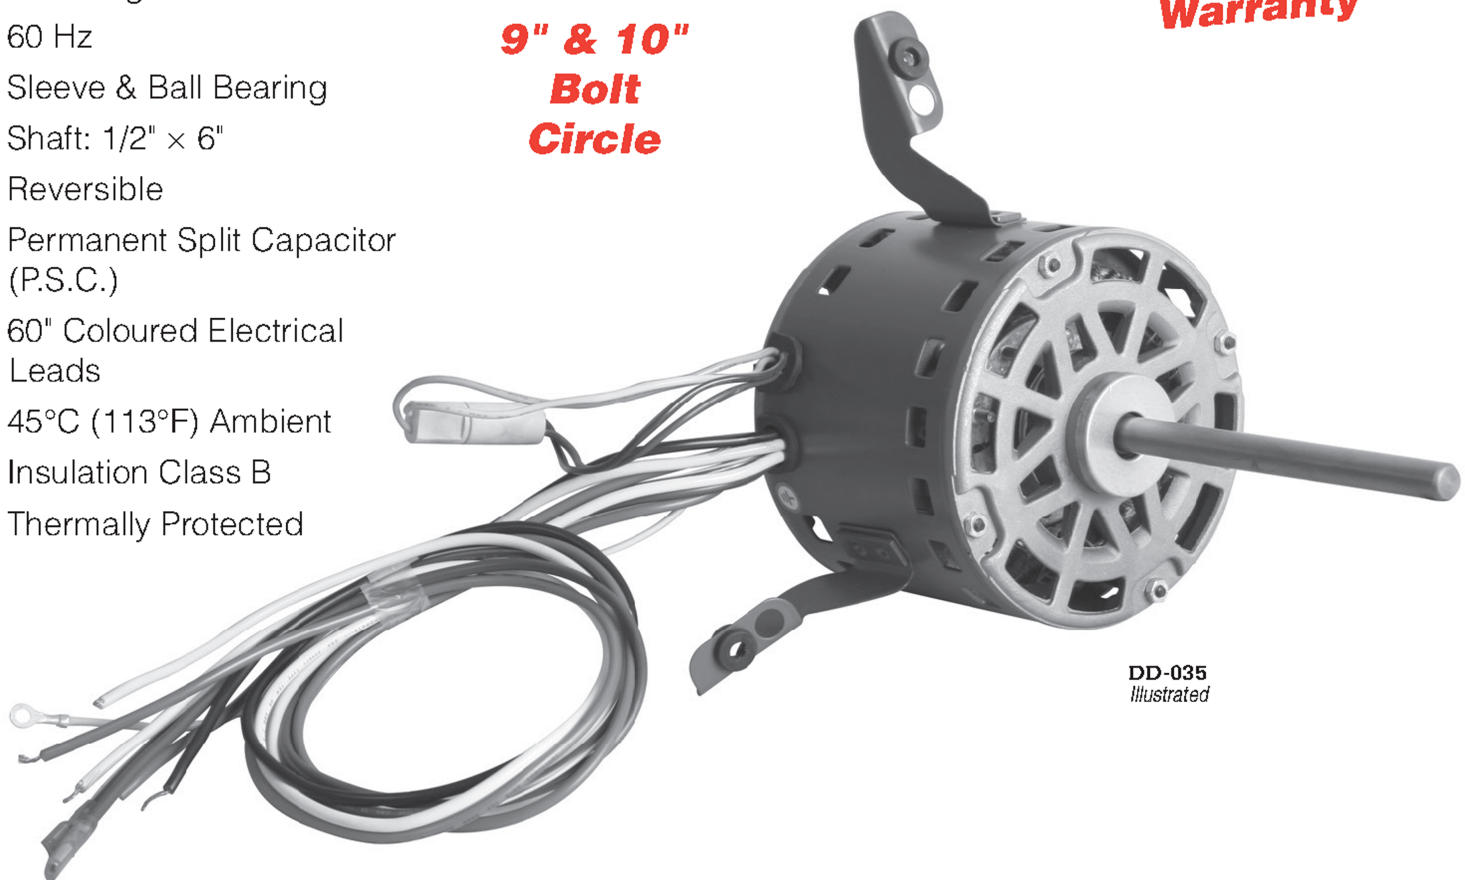

DD-035  
Illustrated

### 115 & 208/230 Volts, 4 Speed, 1075 RPM, Reversible Rotation

| Part # | HP  | Volts   | Amps    | Cap.   | A Dim. | Bearing | Shaft   |
|--------|-----|---------|---------|--------|--------|---------|---------|
| DD-034 | 1/4 | 115     | 3.6     | 5/370  | 3.84"  | Sleeve  | 1/2"x6" |
| DD-044 |     | 208/230 | 1.8/2.0 | 5/370  | 4.00"  | Sleeve  | 1/2"x6" |
| DD-035 | 1/3 | 115     | 5.0     | 10/370 | 4.50"  | Ball    | 1/2"x6" |
| DD-045 |     | 208/230 | 2.3/2.5 | 10/370 | 4.30"  | Sleeve  | 1/2"x6" |
| DD-036 | 1/2 | 115     | 7.6     | 10/370 | 4.85"  | Ball    | 1/2"x6" |
| DD-046 |     | 208/230 | 3.8/4.0 | 10/370 | 4.79"  | Sleeve  | 1/2"x6" |

Capacitor Not Included

### Cross Reference

| Rotom  | AO Smith | Fasco | GE   | Marathon | UE       | Rotom           |
|--------|----------|-------|------|----------|----------|-----------------|
| DD-034 | FML1026  | D1730 | 3783 | X034     | 752      | R42034, R42419  |
| DD-044 | -        | D1733 | 3784 | -        | -        | R42449          |
| DD-035 | FML1036  | D1731 | 3785 | X035     | 753, 947 | R42035, R42319  |
| DD-045 | FM1036   | D1734 | 3786 | -        | -        | R42349          |
| DD-036 | FML1056  | D1732 | 3787 | X036     | 754      | R42036, R 42219 |
| DD-046 | FM1056   | D1735 | 3788 | -        | -        | R42249          |