

PROFICIENCY

ULTRA HIGH EFFICIENCY TOILET



N7717

Comfort Height, ADA-Compliant
Elongated Front, 3.0 lpf
Single-Flush, Two-piece toilet

Features



Ultra High Efficiency Flush

Proficiency delivers a swift and powerful flush with an ultra-efficient 3 litres of water.



Soft-close Seat

The toilet lid and seat close with a light touch, preventing slamming. Moulded with durable, heavy-duty break-resistant plastic.



Large Water Surface

Air is transferred to the trapway during filling of the tank, exerting positive pressure on the water in the bowl and creating a larger surface.



Compact Design

Install and renovate with ease. Have more room for vanities, shelving, or cabinets.



Superior Engineered Ceramics

High-glazed vitreous china provides a smooth, low-friction surface.



Stylish Flush Lever

Inconspicuous, top-mounted, and break-resistant. Spring-loaded and finished in polished chrome.



BUILD GREEN

accrue LEED
Canada credit
points:



Hennessy
& Hinchcliffe



www.watermatrix.com

Canadian Design - Global Impact


PERFORMANCE

Proficiency harnesses the energy of water filling the tank to pressurize the trapway via a patented air transfer system. When flushed, air is sucked out of the trapway, initiating the highly efficient siphonic action. This new technology gives Proficiency the leading edge in water efficiency, achieving the lowest flush volume of any toilet in the industry.

SPECIFICATIONS

Water Usage	3.0 lpf / 0.80 gpf
Flush System	Patented BSB Flushing Technology - Canadian-engineered
MaP Rating	800g
Water Pressure Range	Variable
Water Surface Area	7¼" X 9¼" (184 mm X 235 mm)
Trap Diameter	2" (51 mm)
Trap Seal	2-3/8" (60 mm)
Rough-In	12" (305 mm)
Large Footprint	10-1/5" X 20-3/5" (260 mm X 525 mm)
Material	High glaze vitreous china
Colours	White
Warranty	Lifetime on china 10-year warranty on parts; 1-year on valves
 	Eligible for the highest tier of municipal toilet rebates, where available
	Complies with ASME A112.19.2 and CSA B45 codes and surpasses standards for MaP and drainline carry capacity

DIMENSIONS

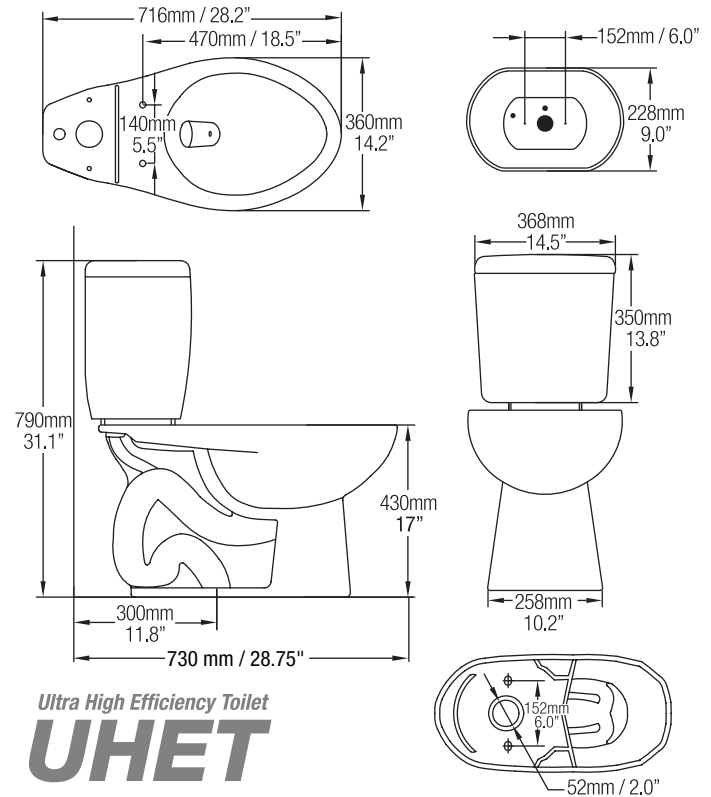

Ultra High Efficiency Toilet
UHET

SHIPPING DIMENSIONS AND WEIGHT

N7715 TANK

16" X 16" X 10"
(406 mm X 406 mm X 254)
30 lbs. (13.6 kg)

N7717 BOWL

29" X 15" X 19"
(737 mm X 381 mm X 483 mm)
56 lbs. (25.4 kg)

Specifications are subject to change without notice.

Distributed & Marketed by:



555 Hanlan Road, Unit 1, Vaughan, Ontario Canada L4L 4R8
Tel: (905) 850-8080 Fax: (905) 850-9100 Toll-Free: 1-800-668-4420
Email: sales@watermatrix.com Website: www.watermatrix.com

