





General Fuel Oil Tank Accessories

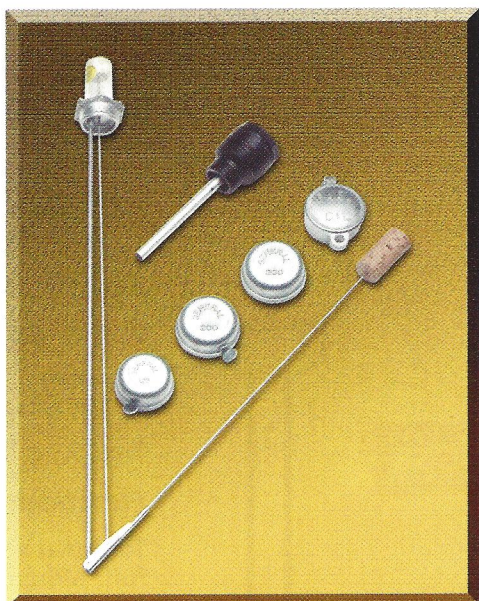

Your number one source for fuel oil filters and cartridges now is your number one source for basic tank accessories. Our Canadian Company has sold these products for years. We now make these same quality, competitive tank accessories available to you, our valued customers. You will find these products to be as valuable to your business as our traditional filters and cartridges. Thank you for your business.

Tank Gauge — GF-100UL



Gauge length is determined by the depth of the tank they are being measured for, not the volume. It is recommended that a 4" space be left between the bottom of the gauge and the bottom of the tank.

The GF-100 gauges will not work on underground tanks.

Features:

1. Sealed Cork to prevent saturation.
2. Easy to read.
3. Listed by Underwriters' Laboratories.

Specifications:

Bushing: 1-1/2" NPT

Length: 44"

Function:


To measure approximate fluid levels in fuel oil tanks.

Installation Instructions:

Vertical Tanks - Empty or completely full.

Round and Horizontal Tanks - Any oil level drop assembly into the threaded tank opening. Screw gauge bushing down until the arrows are pointing to the center of the tank.

Vertical Tanks - Partially full, remove plastic cup, drop float assembly through threaded tank opening. Lift indicator rod to its full height and hold in position while threading the bushing down. Arrow must point to center of the tank. rubber gasket must be properly seated. Replace plastic cup by giving it a 1/4 turn.

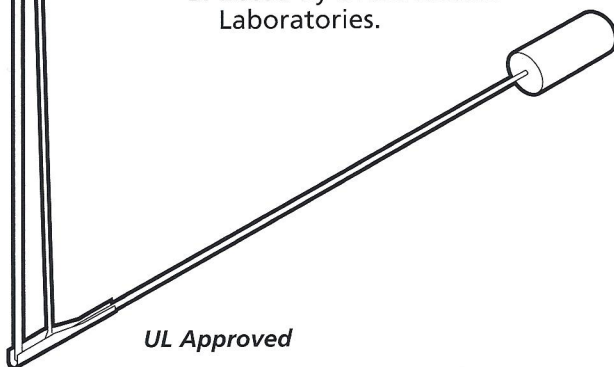

UL Approved