





LED CFL Replacement Lamps

LED lamps are the ideal solution to replace plug-in compact fluorescent lamps and are just as easy to install. These LED lamps are available in 2-pin and 4-pin, as well as in horizontal and vertical models.

They are perfect for use in commercial buildings, hotels and offices by providing an eco-friendly and cost saving alternative to any ceiling fixture, recessed can, downlight and sconce.

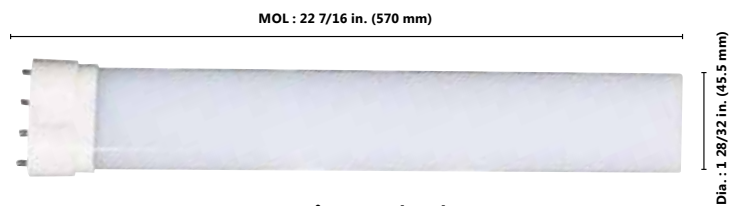

Horizontal



2G11

Order code	Description	Operating position	Watts (W)	Base	Colour temp. (K)	CRI	Life L70 (hrs)	Lumen output ¹ (lm)	CFL replacement (W)	Dimming capability (Yes/No)	Case qty (inner/master)
PLL											
Electronic ballast compatible installation											
65603 ²	LED/PLL/19W/35K/2G11/ND/STD	Horizontal	19	2G11	3 500	83	50 000	1 900	40	No	1/30
65604 ²	LED/PLL/19W/40K/2G11/ND/STD	Horizontal	19	2G11	4 000	83	50 000	2 000	40	No	1/30

¹ Lumen values are derived from photometric testing.
² This lamp only operates on electronic ballasts in 120-277/347 V applications.



Dia. : 1 5/16 in. (33.0 mm)

Horizontal
Vertical

GX23

Dia. : 1 13/32 in. (35.5 mm)



Horizontal



GX23

Dia. : 1 5/8 in. (41 mm)



Horizontal



G24d

Dia. : 2 1/8 in. (54 mm)



Vertical



G24d

Order code	Description	Operating position	Watts (W)	Base*	Colour temp. (K)	CRI	Life L70 (hrs)	Lumen output ¹ (lm)	CFL replacement (W)	Dimming capability (Yes/No)	Case qty (inner/master)
------------	-------------	--------------------	-----------	-------	------------------	-----	----------------	--------------------------------	---------------------	-----------------------------	-------------------------

PL 2-pins**Dual installation: Ballast compatible or bypass**

65366 ²	LED/PLV-H/6W/TT/27K/GX23/ND/STD	Vertical-Horizontal	6	GX23	2 700	83	50 000	525	13	No	1/20
65371 ²	LED/PLH/6W/DTT/27K/GX23/ND/STD	Horizontal	6	GX23	2 700	83	50 000	500	13	No	10/50
65367 ²	LED/PLV-H/6W/TT/40K/GX23/ND/STD	Vertical-Horizontal	6	GX23	4 000	83	50 000	550	13	No	1/20
65372 ²	LED/PLH/6W/DTT/40K/GX23/ND/STD	Horizontal	6	GX23	4 000	83	50 000	525	13	No	10/50
64898 ²	LED/PLVL/11W/27K/2P/ND/STD	Vertical	11	G24d	2 700	82	50 000	947	18/26	No	10/50
64899 ²	LED/PLH/11W/27K/2P/ND/STD	Horizontal	11	G24d	2 700	82	50 000	962	18/26	No	10/50
64478 ²	LED/PLVL/11W/40K/2P/ND/STD	Vertical	11	G24d	4 000	84	50 000	1 144	18/26	No	10/50
64479 ²	LED/PLH/11W/40K/2P/ND/STD	Horizontal	11	G24d	4 000	85	50 000	1 132	18/26	No	10/50

LED PL Bases* **Replacement for CFL bases**

GX23	GX23, GX23-2
G24d	G24d-2, G24d-3

NOTE: These LED lamps are a direct replacement for the CFL bases listed above. However, the base compatibility of these LED lamps is not limited to the CFL bases mentioned above.

¹ Lumen values are derived from photometric testing.

² This lamp only operates on magnetic ballasts or ballast bypass in 120-277V applications. Not for use in 347V direct line voltage applications.





Order code	Description	Operating position	Watts (W)	Base*	Colour temp. (K)	CRI	Life L70 (hrs)	Lumen output ¹ (lm)	CFL replacement (W)	Dimming capability (Yes/No)	Case qty (inner/master)
------------	-------------	--------------------	-----------	-------	------------------	-----	----------------	--------------------------------	---------------------	-----------------------------	-------------------------

PL 4-pins Ballast bypass installation

65368 ²	LED/PLH/6W/DTT/30K/G24q/ND/STD	Horizontal	6	G24q	3 000	83	50 000	525	13	No	10/50
65369 ²	LED/PLH/6W/DTT/35K/G24q/ND/STD	Horizontal	6	G24q	3 500	83	50 000	500	13	No	10/50
65370 ²	LED/PLH/6W/DTT/40K/G24q/ND/STD	Horizontal	6	G24q	4 000	83	50 000	525	13	No	10/50

Electronic ballast compatible installation

64470 ³	LED/PLVL/13W/27K/4P/ND/STD	Vertical	13	G24q	2 700	81	50 000	997	18/26	No	10/50
64471 ³	LED/PLH/13W/27K/4P/ND/STD	Horizontal	13	G24q	2 700	82	50 000	958	18/26	No	10/50
64472 ³	LED/PLVL/13W/30K/4P/ND/STD	Vertical	13	G24q	3 000	81	50 000	1 043	18/26	No	10/50
64473 ³	LED/PLH/13W/30K/4P/ND/STD	Horizontal	13	G24q	3 000	81	50 000	1 027	18/26	No	10/50
64474 ³	LED/PLVL/13W/35K/4P/ND/STD	Vertical	13	G24q	3 500	80	50 000	1 118	18/26	No	10/50
64475 ³	LED/PLH/13W/35K/4P/ND/STD	Horizontal	13	G24q	3 500	80	50 000	1 118	18/26	No	10/50
64476 ³	LED/PLVL/13W/40K/4P/ND/STD	Vertical	13	G24q	4 000	84	50 000	1 166	18/26	No	10/50
64477 ³	LED/PLH/13W/40K/4P/ND/STD	Horizontal	13	G24q	4 000	85	50 000	1 162	18/26	No	10/50

LED PL Bases*	Replacement for CFL bases
G24q-6W	G24q-1, GX24q-1
G24q-13W	G24q-2, G24q-3, GX24q-2, GX24q-3

NOTE: These LED lamps are a direct replacement for the CFL bases listed above. However, the base compatibility of these LED lamps is not limited to the CFL bases mentioned above.

¹ Lumen values are derived from photometric testing.
² This lamp only operates on ballast bypass installation in 120-277V applications.
 Not for use in 347V direct line voltage applications.
³ This lamp only operates on electronic ballasts in 120-277/347 V applications.

