



Reach™ Curv

One-piece compact elongated dual-flush toilet
K-23188-HC

Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design.
- Compact elongated bowl offers added comfort while occupying the same space as a round-front bowl.
- Standard height.
- Top-mount dual-flush actuator offers a choice of 0.8 or 1.28 gpf (3.0 or 4.8 lpf).
- 2" (51 mm) fully glazed trapway.
- Fully skirted trapway simplifies cleaning.
- Hidden cord design conceals bidet seat cords.
- Alternative option available: Reach Curv with nonhidden cord design (K-23188).

Installation

- Standard 12" (305 mm) rough-in.
- Supply line sold separately.
- Bidet seat sold separately.

Recommended Products/Accessories

K-26132-CSP C³®-420 Elongated bidet toilet seat
K-27142-CR C³®-430 Elongated bidet toilet seat
1265114 Connector Hose
1023457 Wax Ring/Hardware Kit



Codes/Standards

ASME A112.19.2/CSA B45.1
ASME A112.19.14
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)


KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------


	0	White
---	---	-------



Reach™ Curv

One-piece compact elongated dual-flush toilet

K-23188-HC

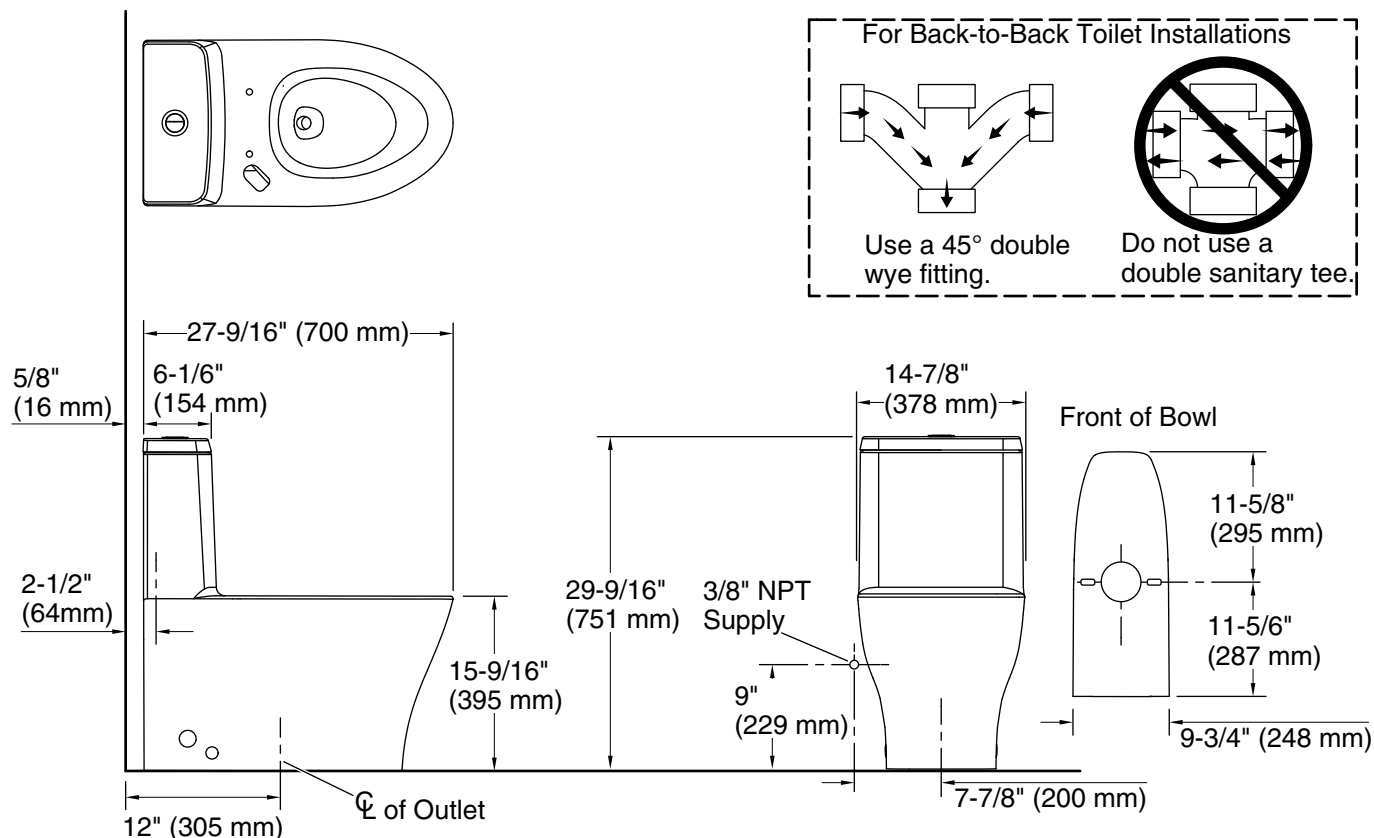

Technical Information

All product dimensions are nominal.

Toilet type:	Floor-mount
Waste Outlet:	Floor
Bowl shape:	Compact elongated
Flush type:	Siphon jet
Trap passageway:	2" (51 mm)
Water Consumption	
Full:	1.28 gpf (4.8 lpf)
Reduced:	0.8 gpf (3 lpf)
Water surface size:	7-3/4" x 5-3/4" (197 mm x 146 mm)
Rim to water surface:	5-13/16" (148 mm)
Rough-in:	12" (305 mm)
Seat-mounting holes:	5-1/2" (140 mm)
Template:	Footprint, 1392770-7, not required, not included

Fixture Supply Requirements

Min static pressure:	20 psi (137.9 kPa)
Max static pressure:	80 psi (551.6 kPa)

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

9-15-2021 04:53 - US/CA

Notes

Install this product according to the installation instructions.

THE BOLD LOOK
OF **KOHLER**